


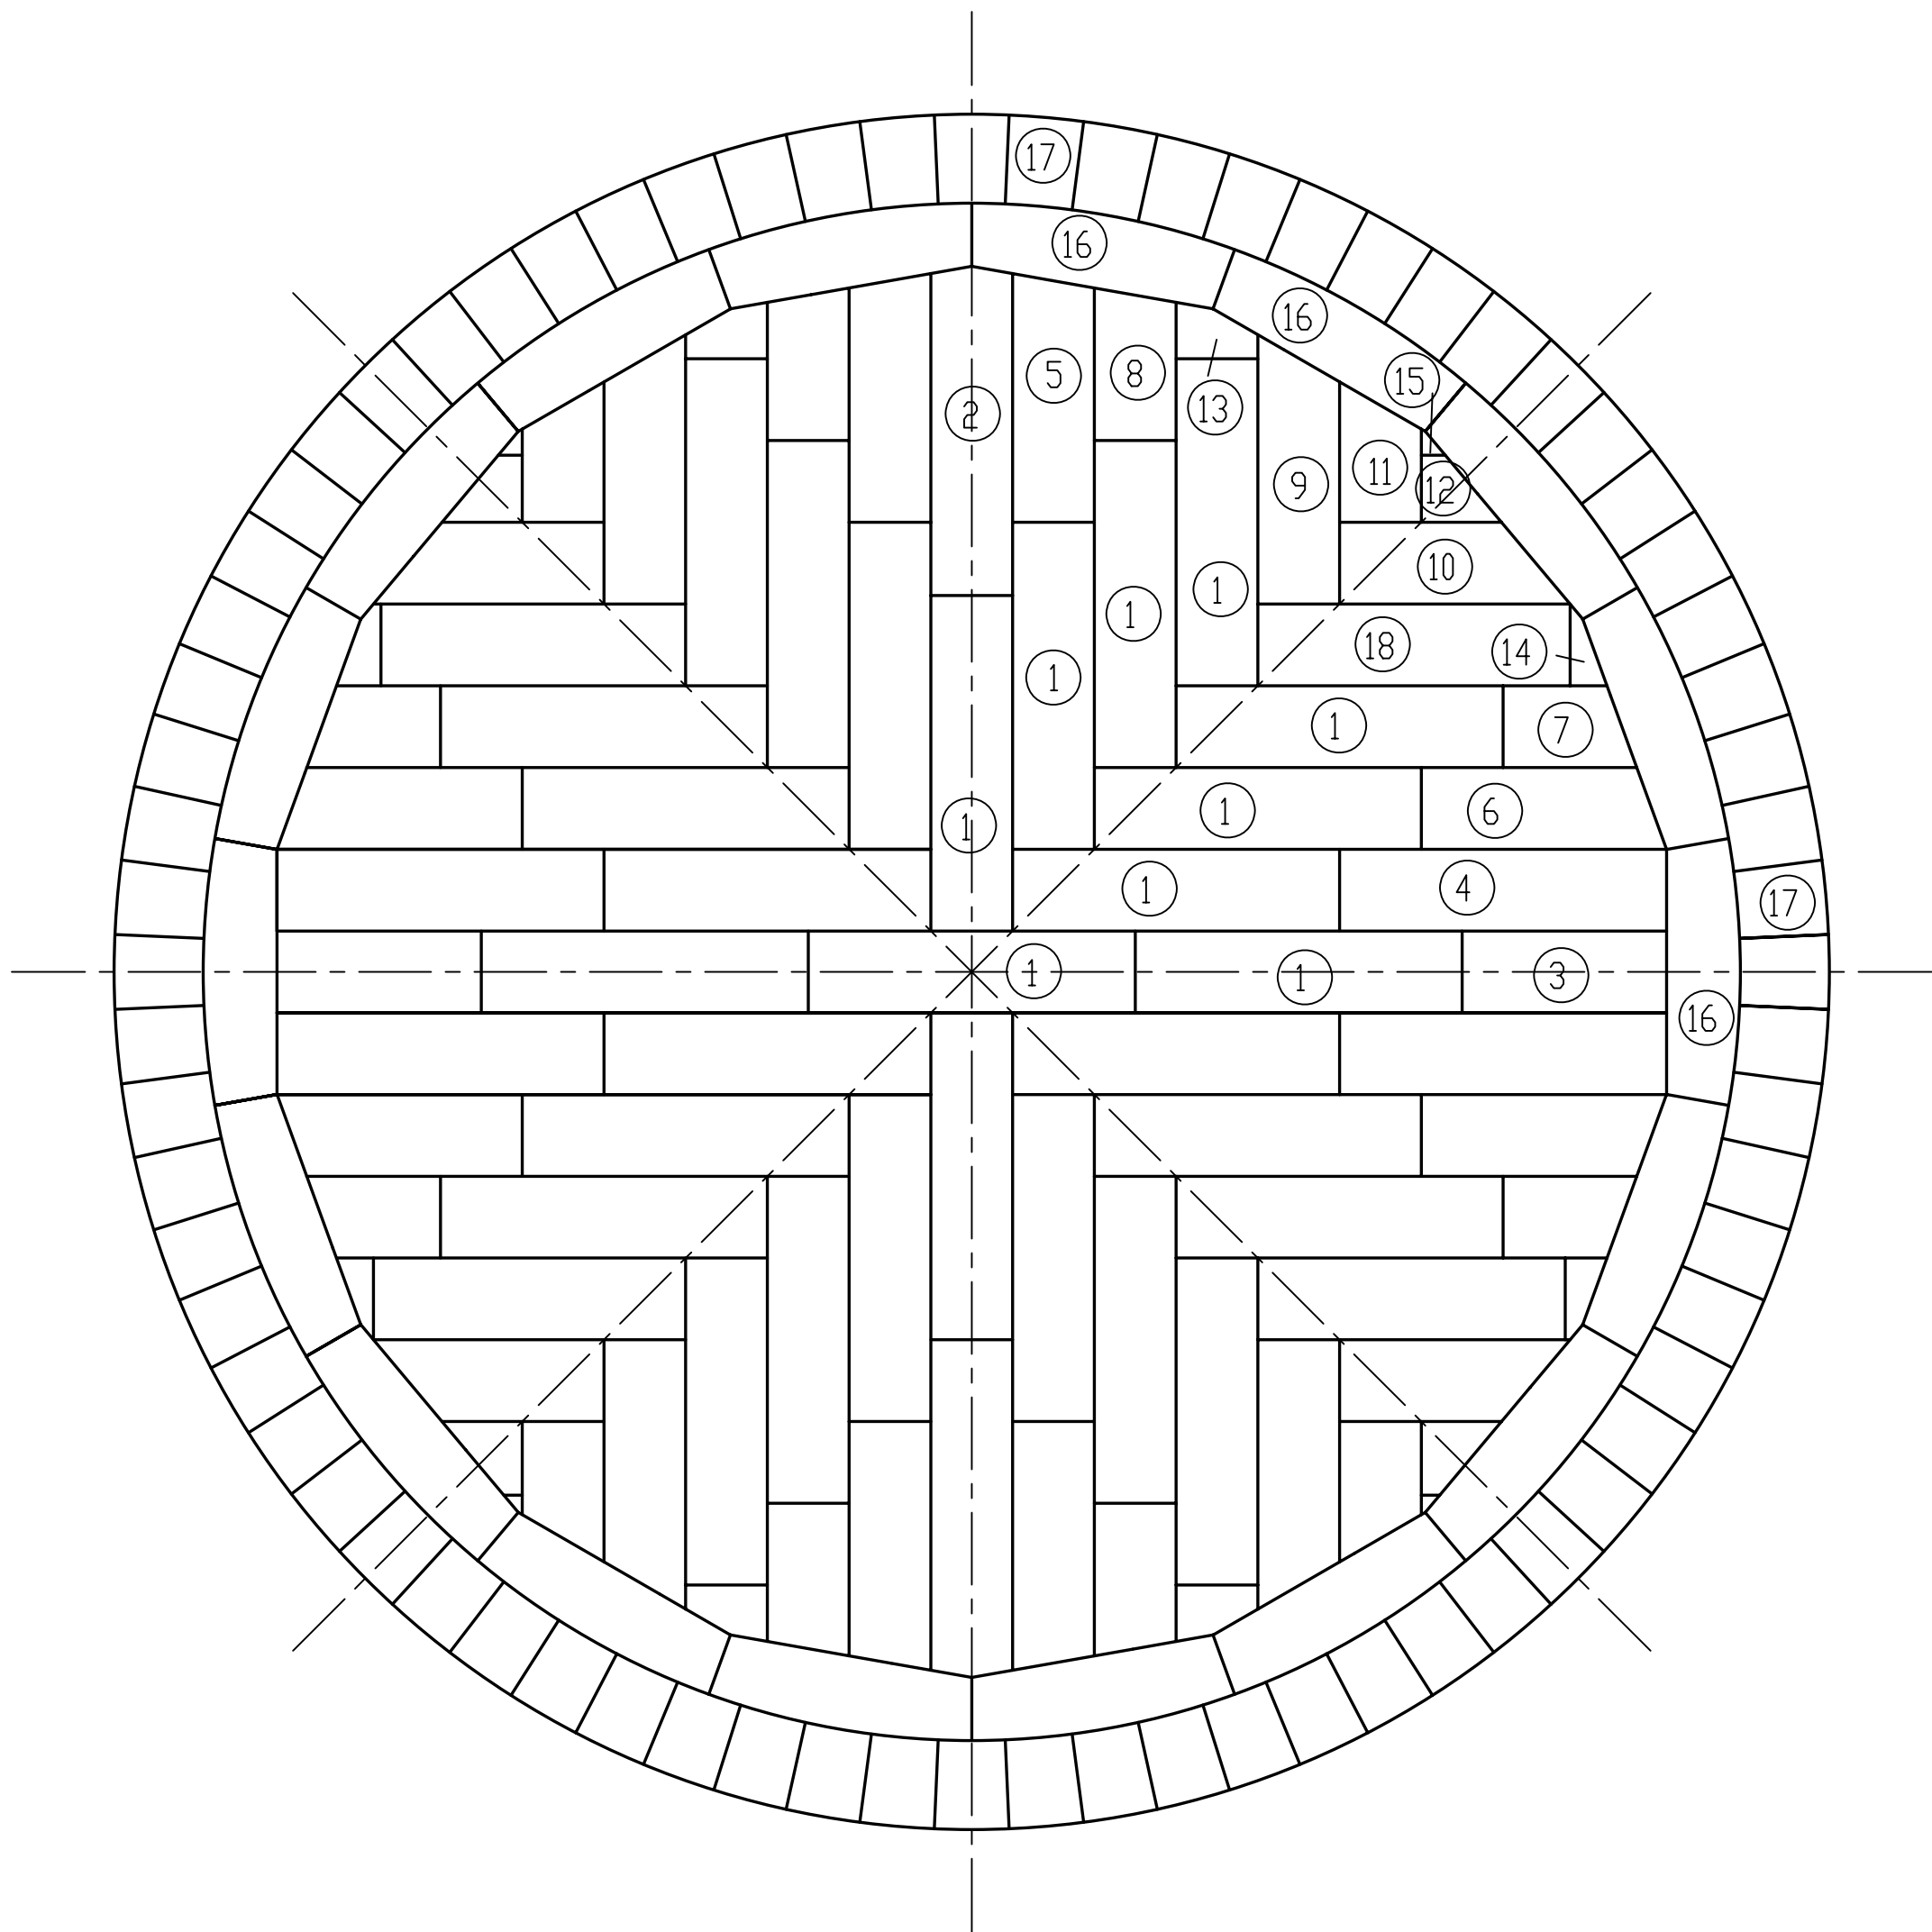


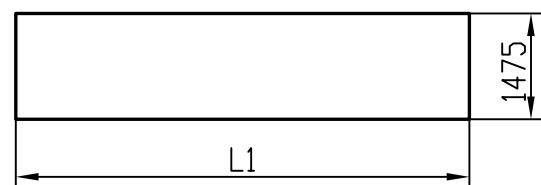


活塞底板布置图(Pac)

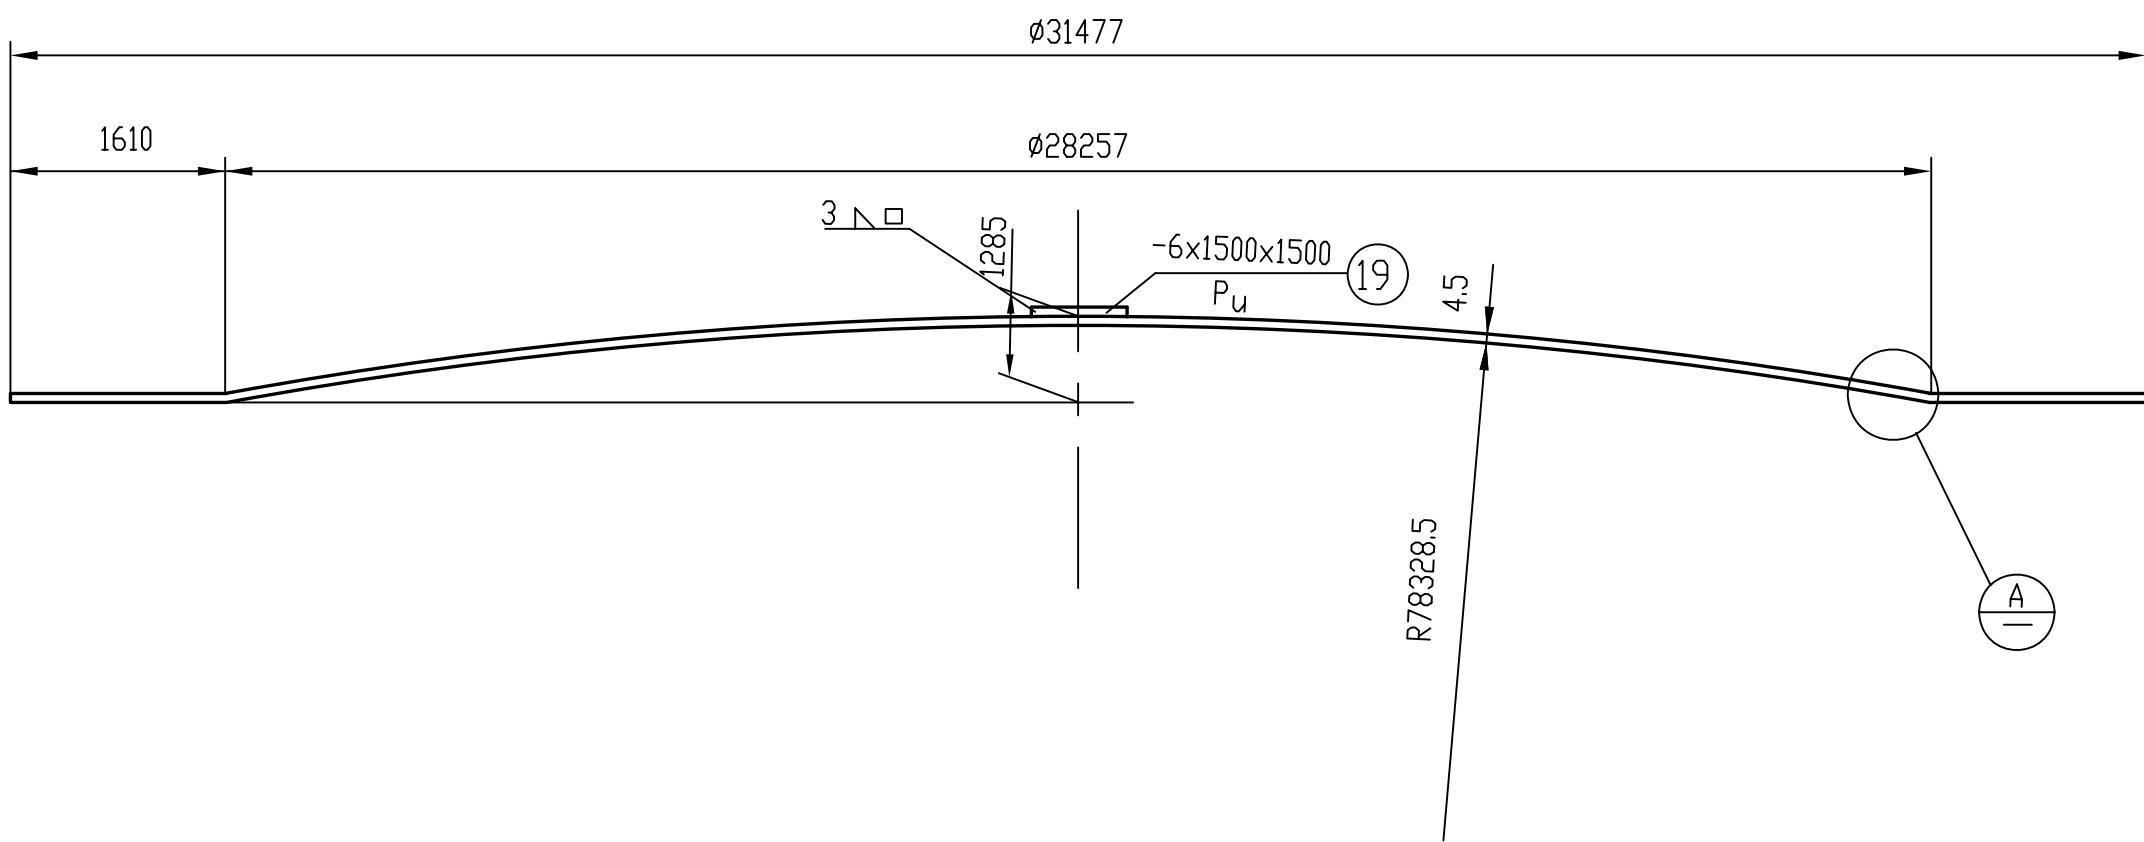


①③④详图

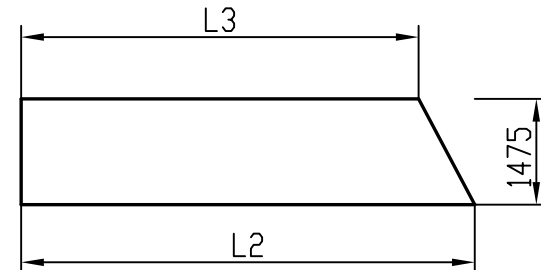


⑤⑦⑫详图

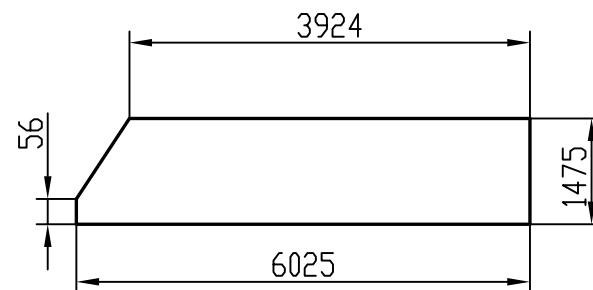


⑥详图

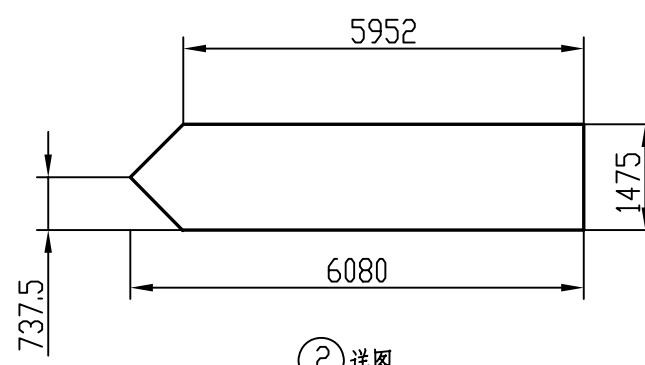


②详图

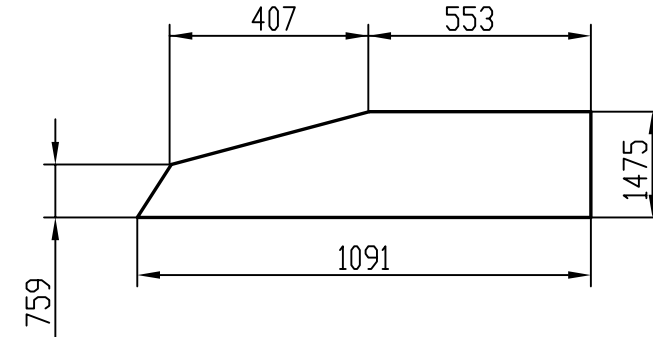


⑬详图

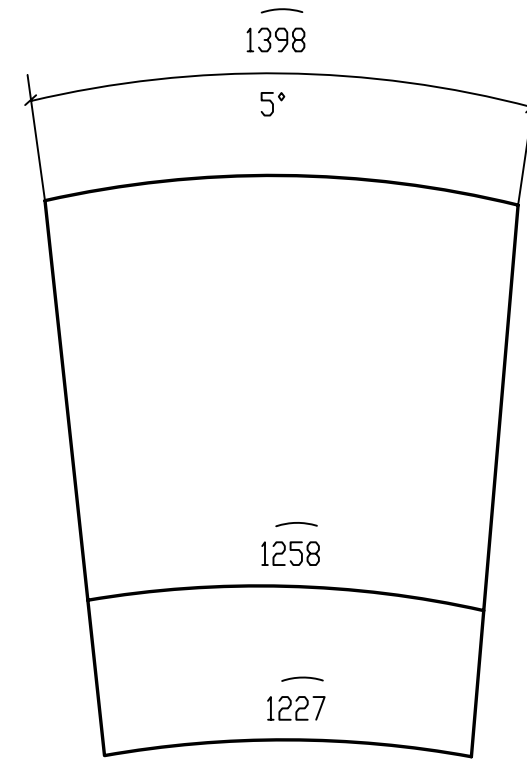


⑰详图

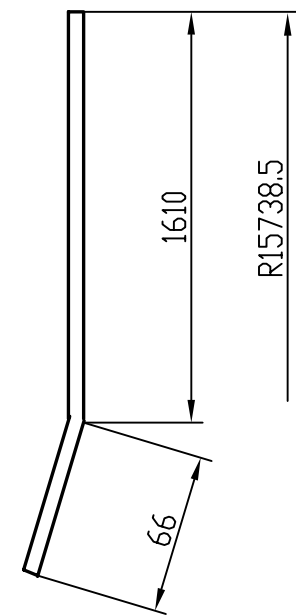


1

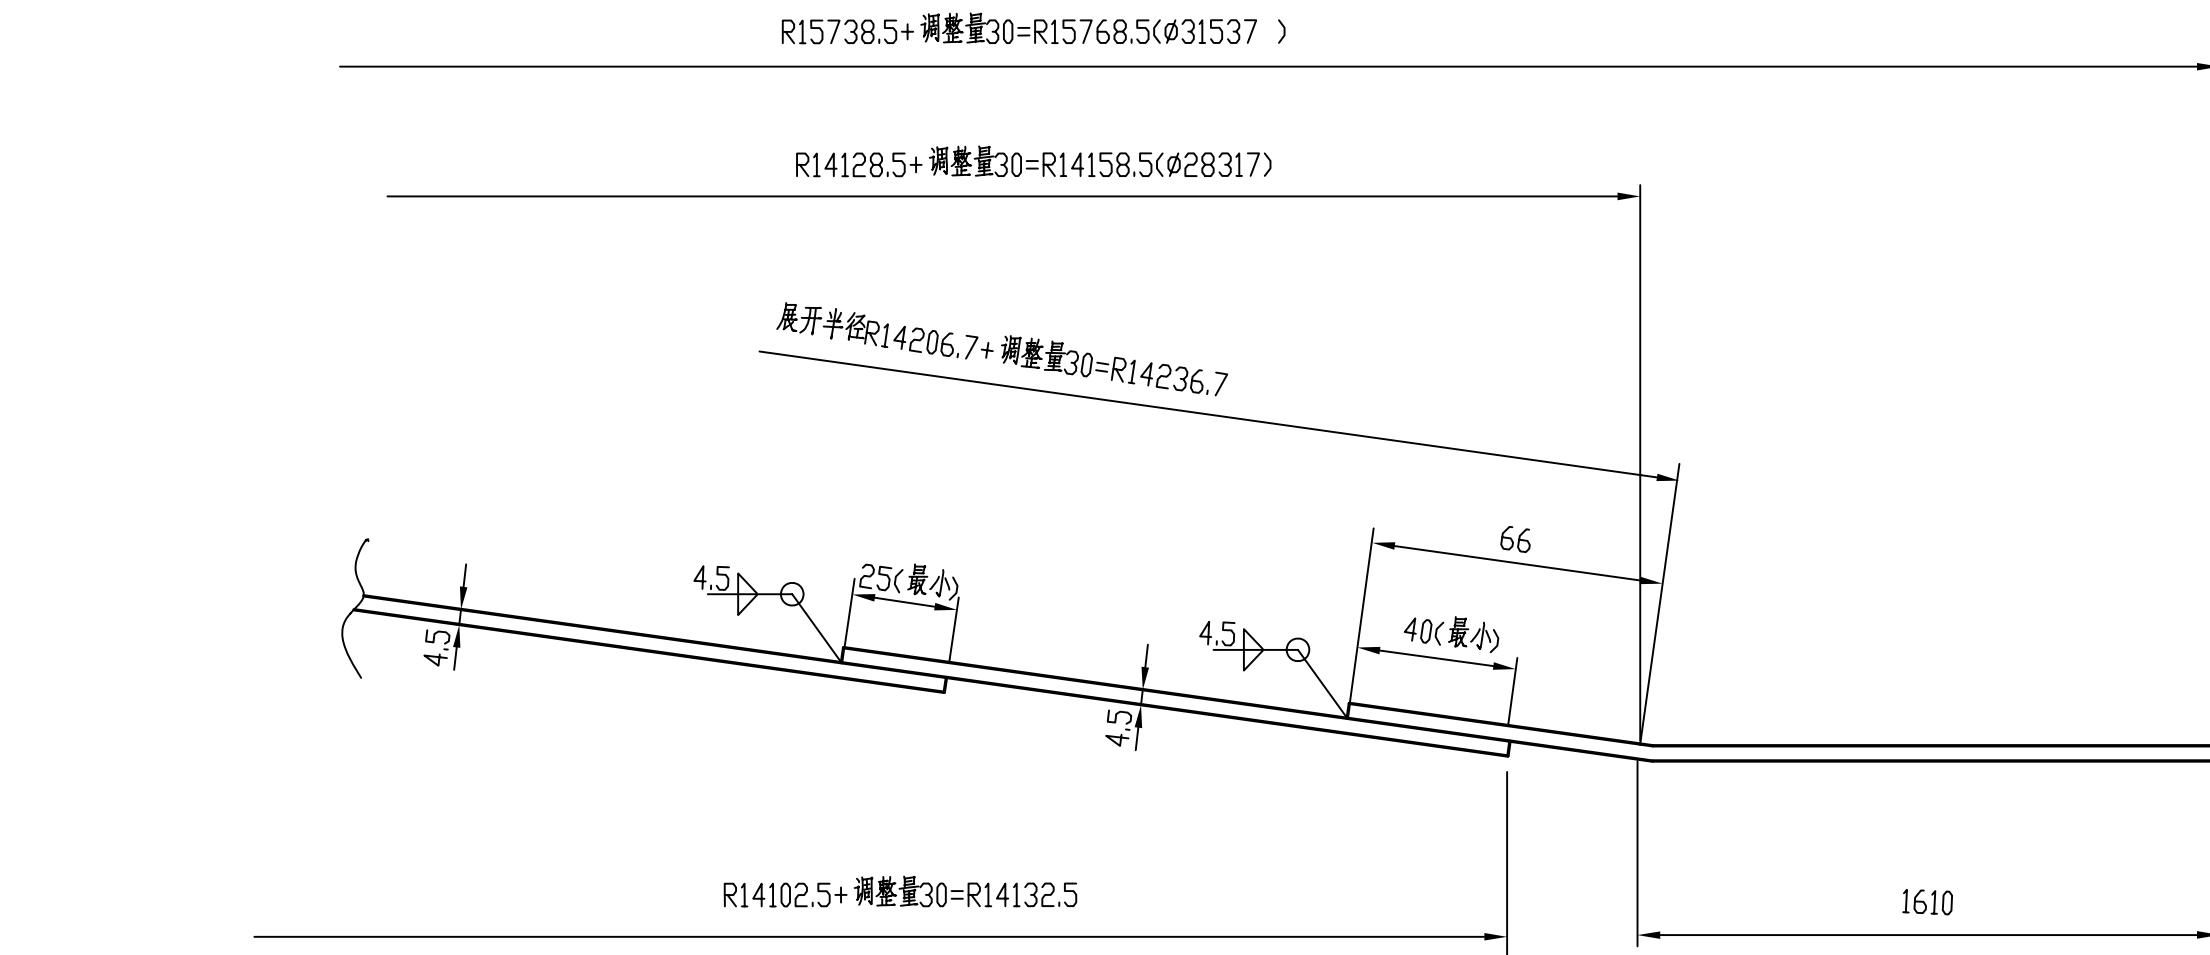


A

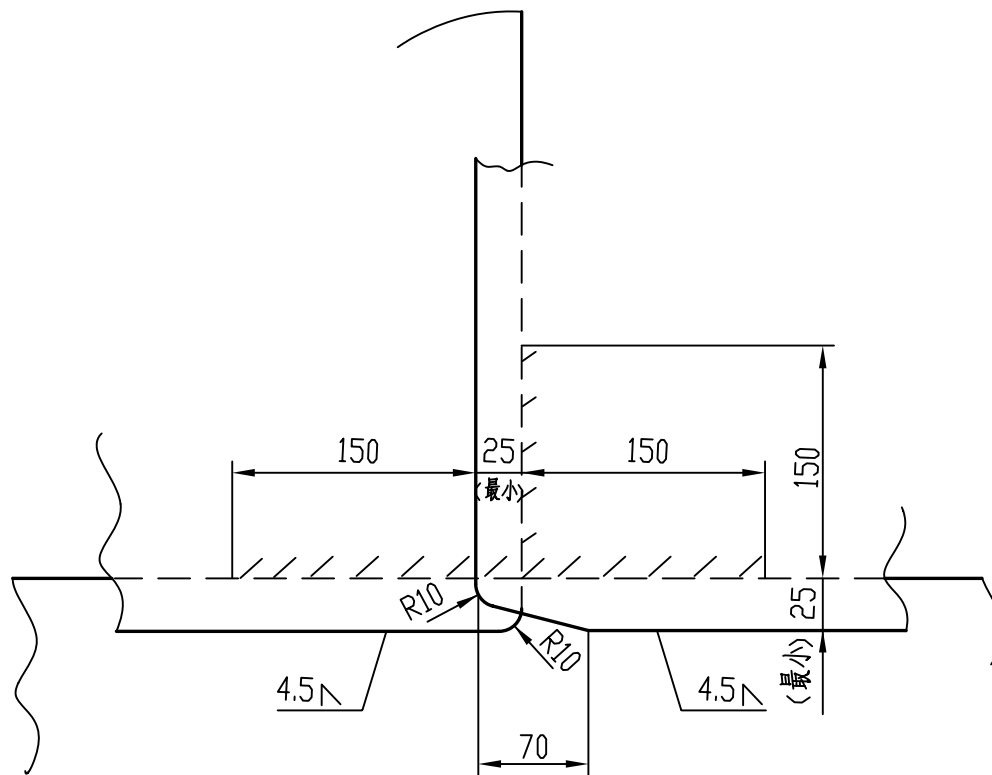


三板搭接详图

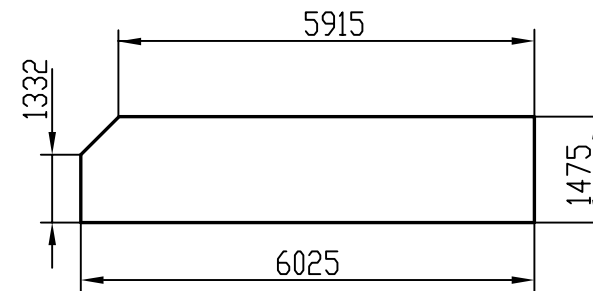


⑱详图

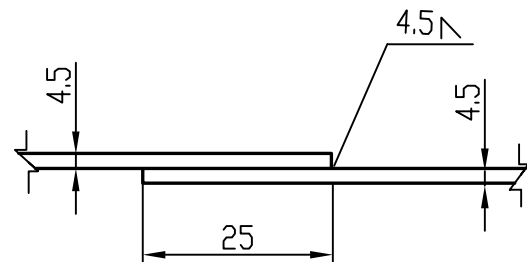


二板搭接详图

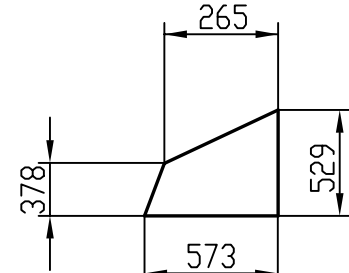

⑮详图

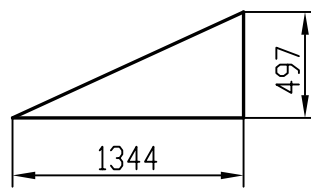

⑭详图

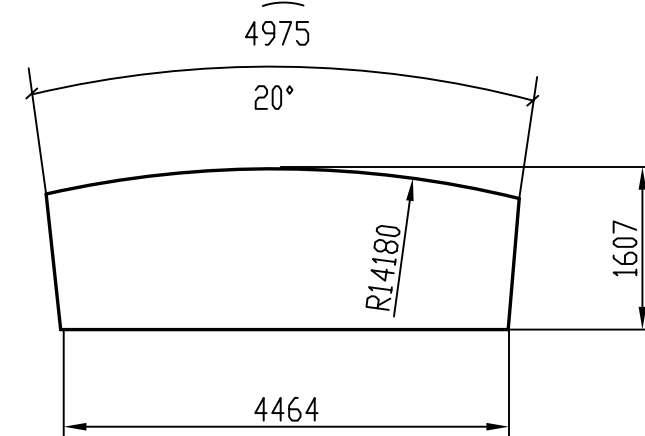

⑯详图

编 号	L2	L3
5	4502	4247
7	2474	1947
8	2797	2541
9	5103	4266
10	4465	3244
11	2816	1979
12	1794	573

编 号	L1
1	6025
3	3611
4	5886

合 计 30384

Pac (1个)	19	-1475X4.5	1500	1	105.9	106	镀锌
	18	-1475X4.5	6025	4	313.9	1256	
	17	-1398X4.5	1676	72	82.8	5962	
	16	-1607X4.5	4950	18	281	5058	
	15	-529X4.5	573	4	10.7	43	
	14	-497X4.5	1344	4	23.6	94	
	13	-1475X4.5	1091	4	56.8	227	
	12	-1475X4.5	1794	4	93.5	374	
	11	-1475X4.5	2816	4	146.7	587	
	10	-1475X4.5	4465	4	232.6	930	
	9	-1475X4.5	5103	4	265.9	1064	
	8	-1475X4.5	2797	4	145.7	583	
	7	-1475X4.5	2474	4	128.9	516	
	6	-1475X4.5	6025	4	313.93	1255.7	
	5	-1475X4.5	4502	4	234.6	938	
	4	-1475X4.5	5886	4	306.7	1277	
	3	-1475X4.5	3611	2	188.1	376	
	2	-1475X4.5	6080	2	316.8	634	
	1	-1475X4.5	6025	29	313.9	9103	

标号	编号	断面尺寸(mm)	长度(mm)	数量	单重 重量(kg)	总重	备注
设计		九江石化设计工程有限公司		建设单位	腾龙芳烃(漳州)有限公司		
校核				项目名称	腾龙芳烃(漳州)80万吨/年对二甲苯工程		
审核				设计阶段		详细设计	
审定				专 业		设备	
				单 元 号			
				比 例		1:150	
				D3320-70-00-63-T-101/11-3			

20000m³ 卷帘型干式
气柜活塞构件
活塞底板布置图及详图

会签专业	签署人	日 期