
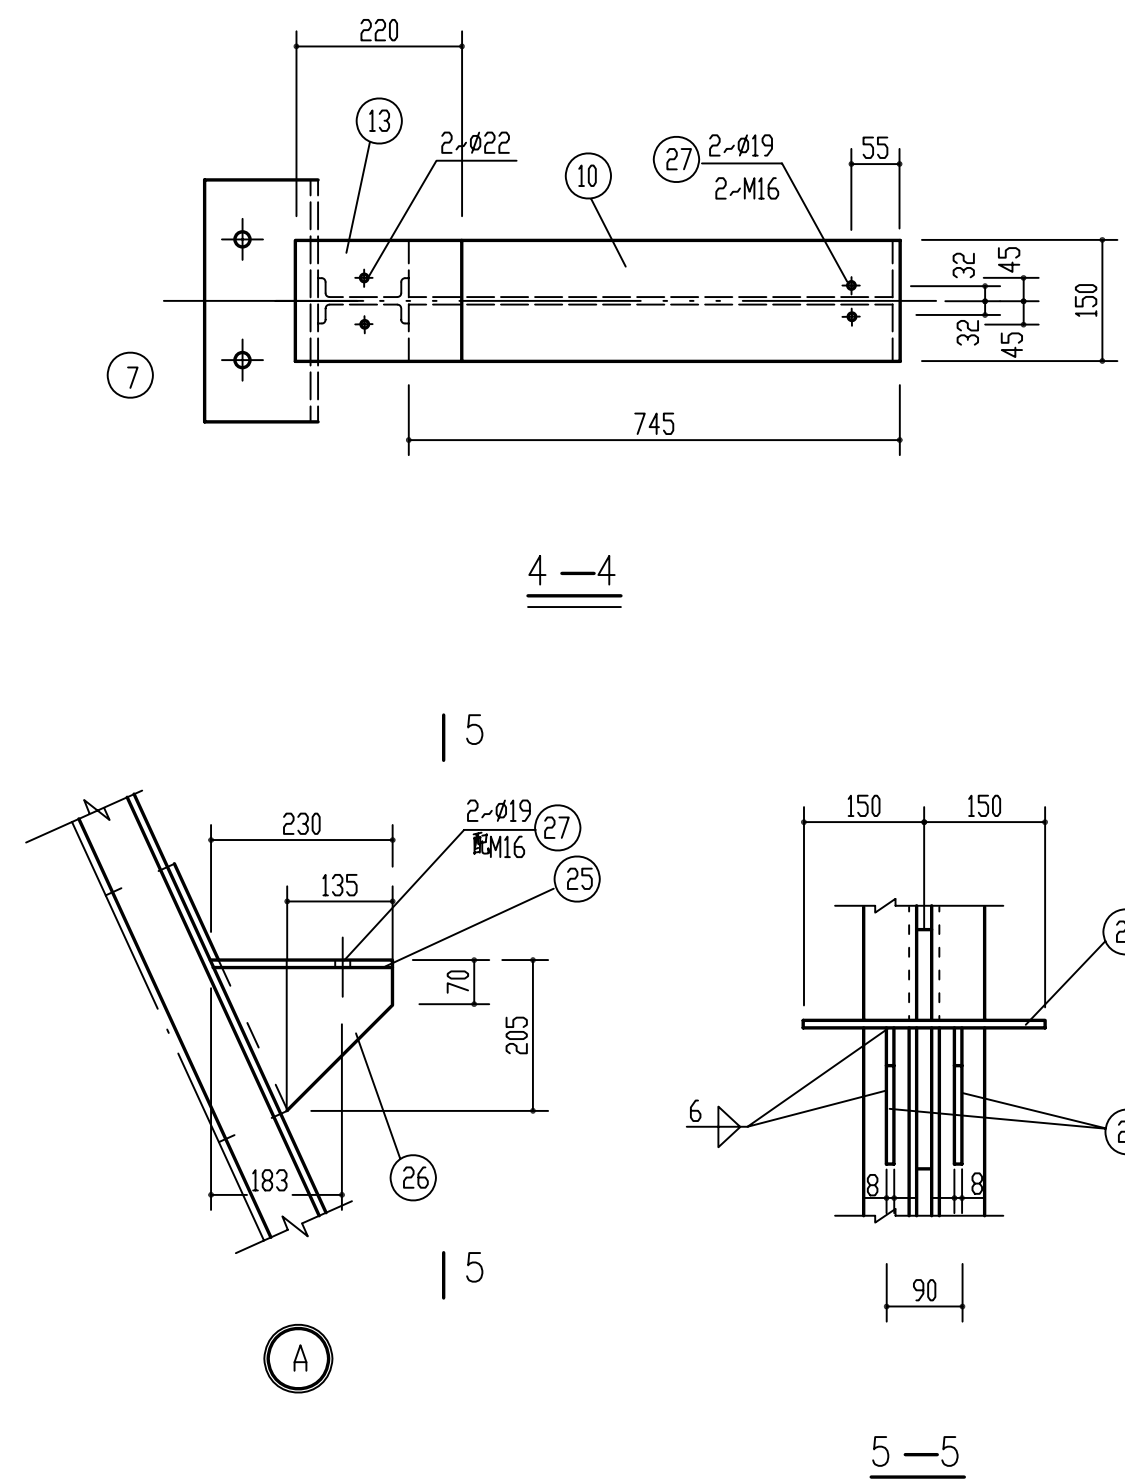
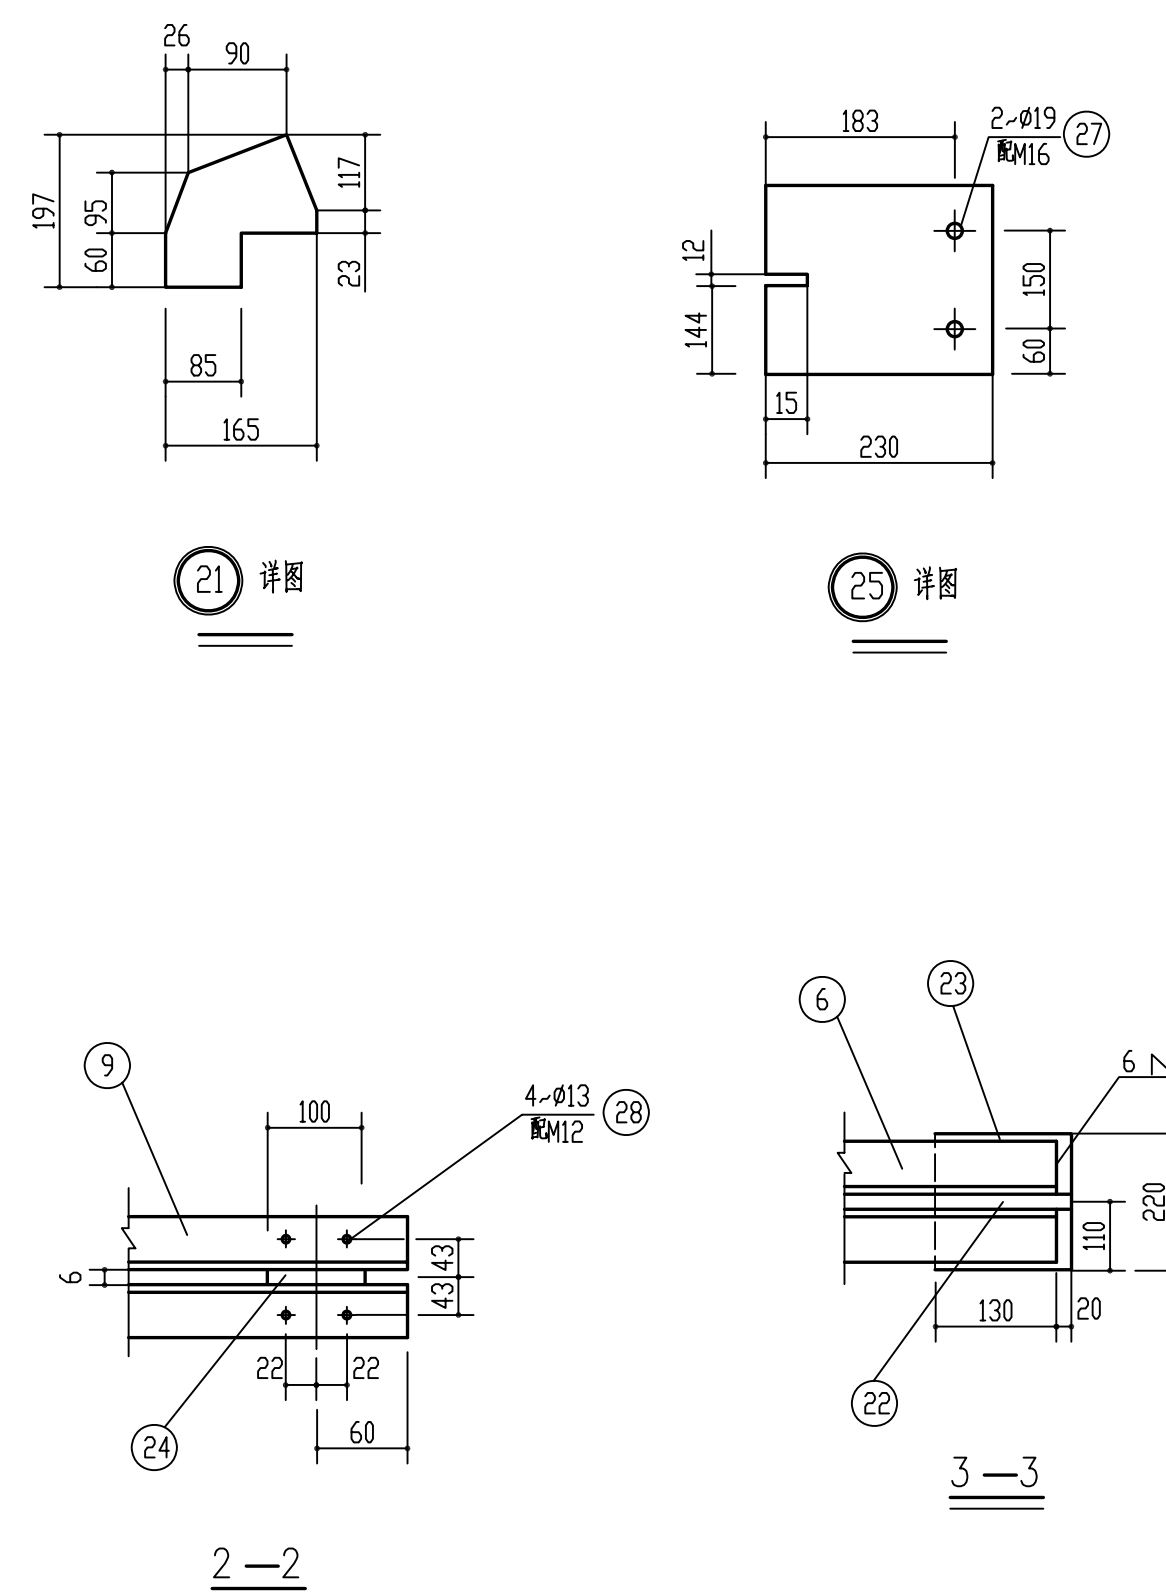
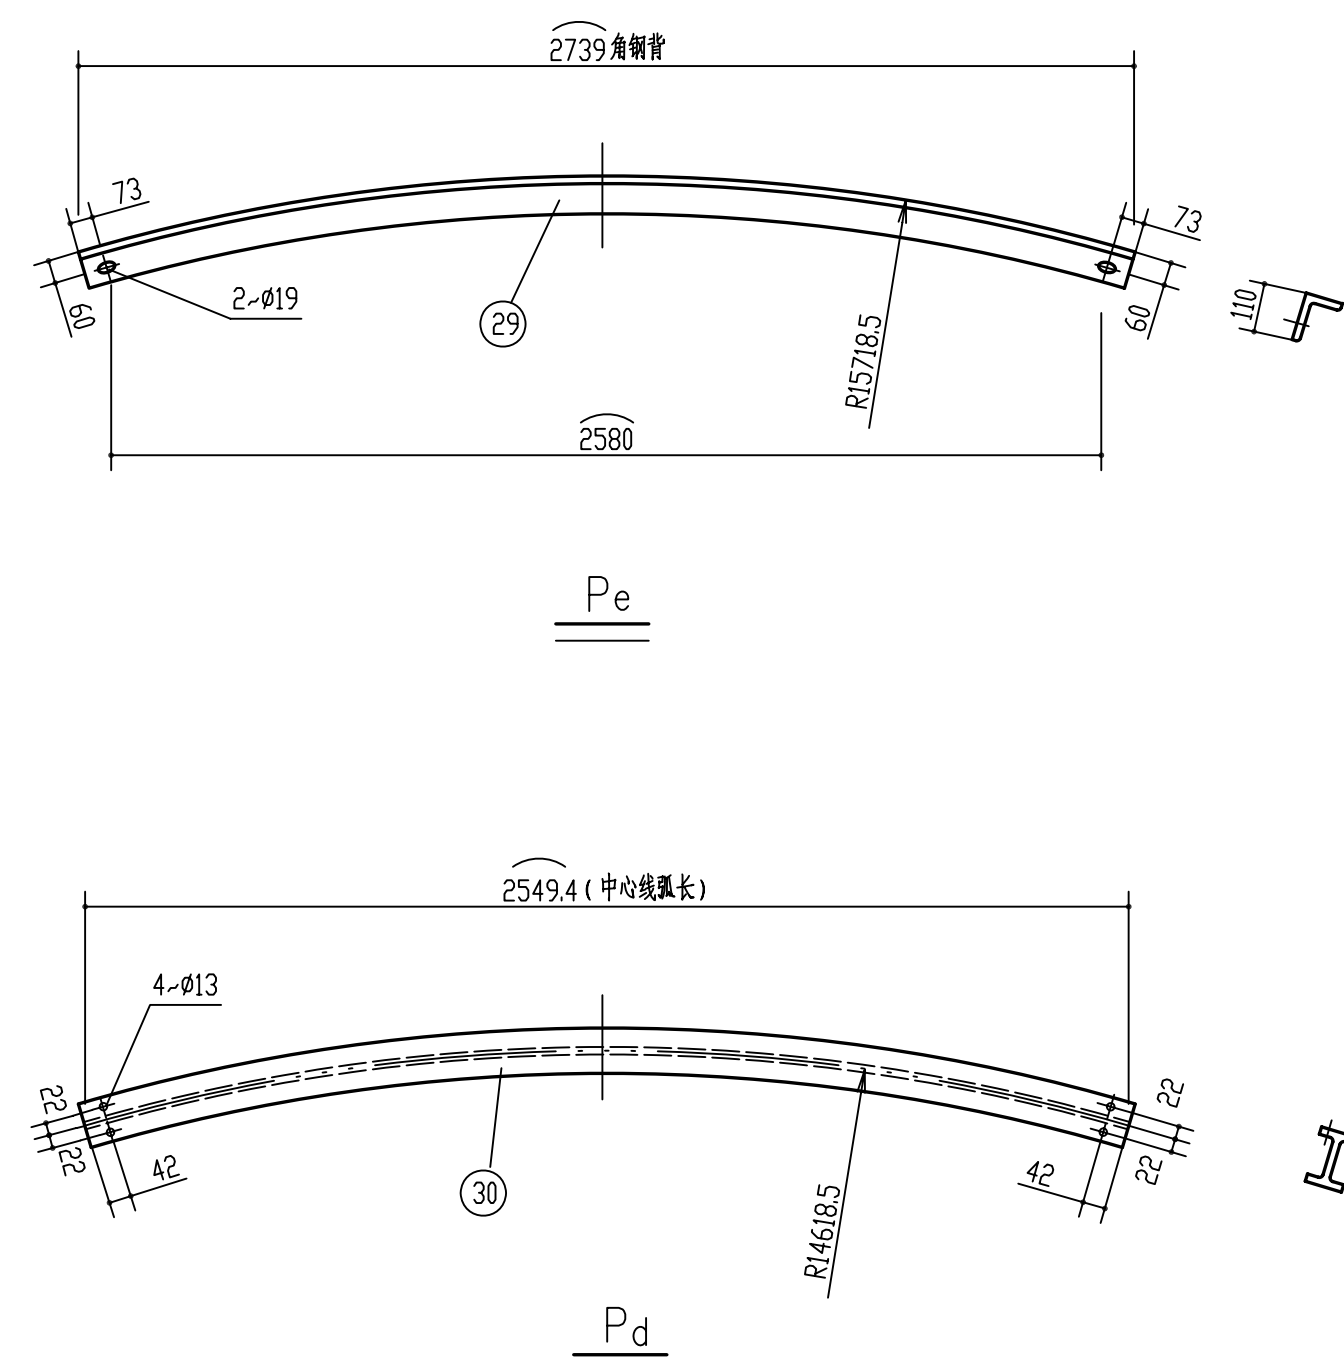
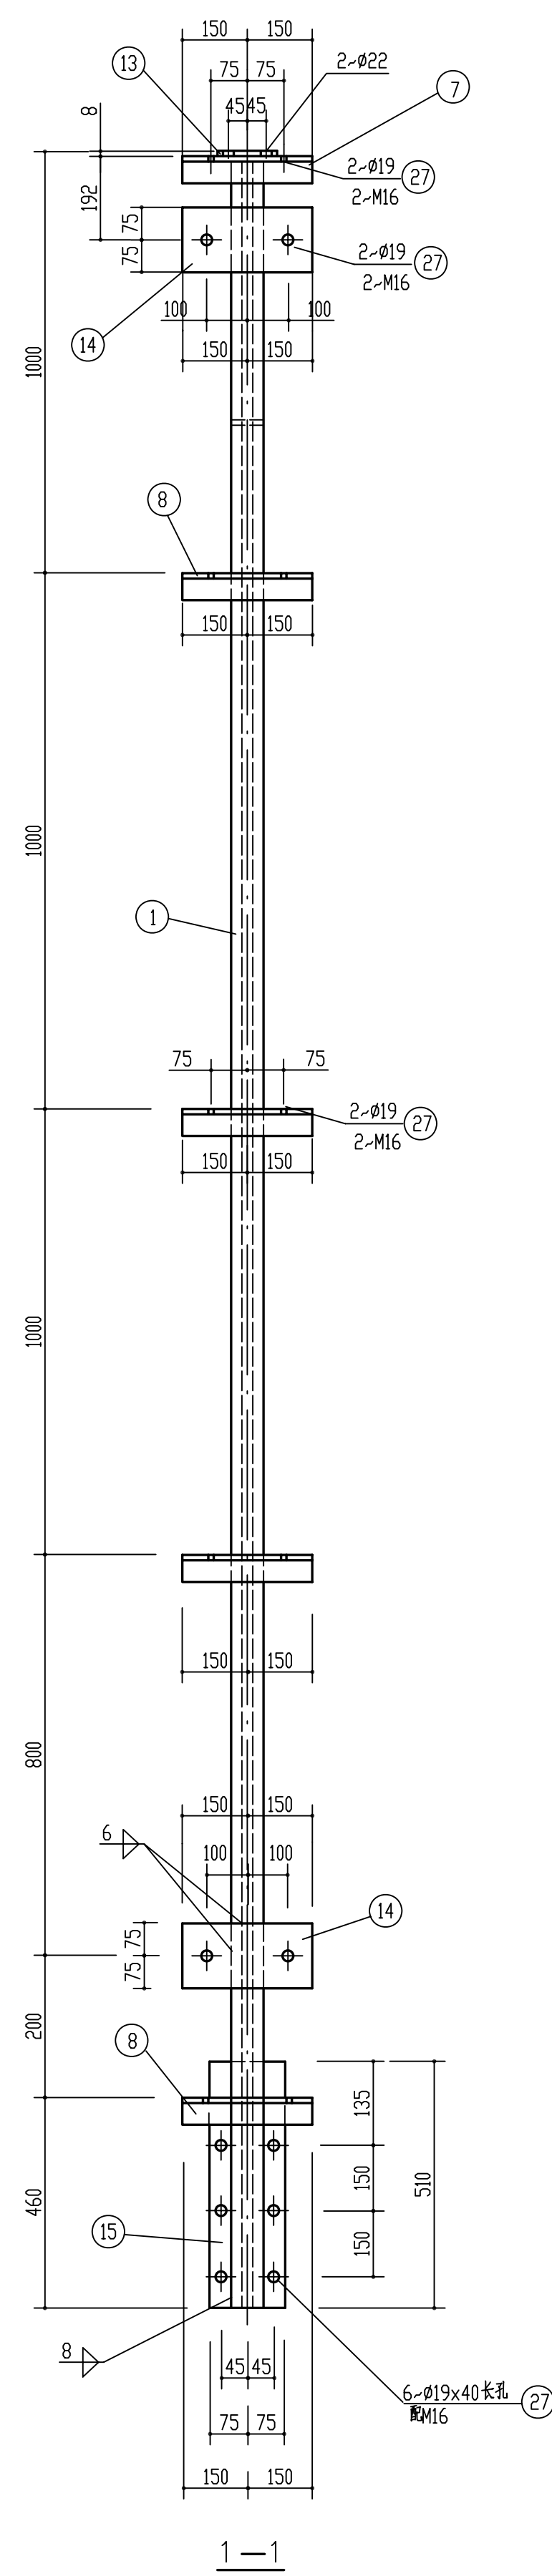


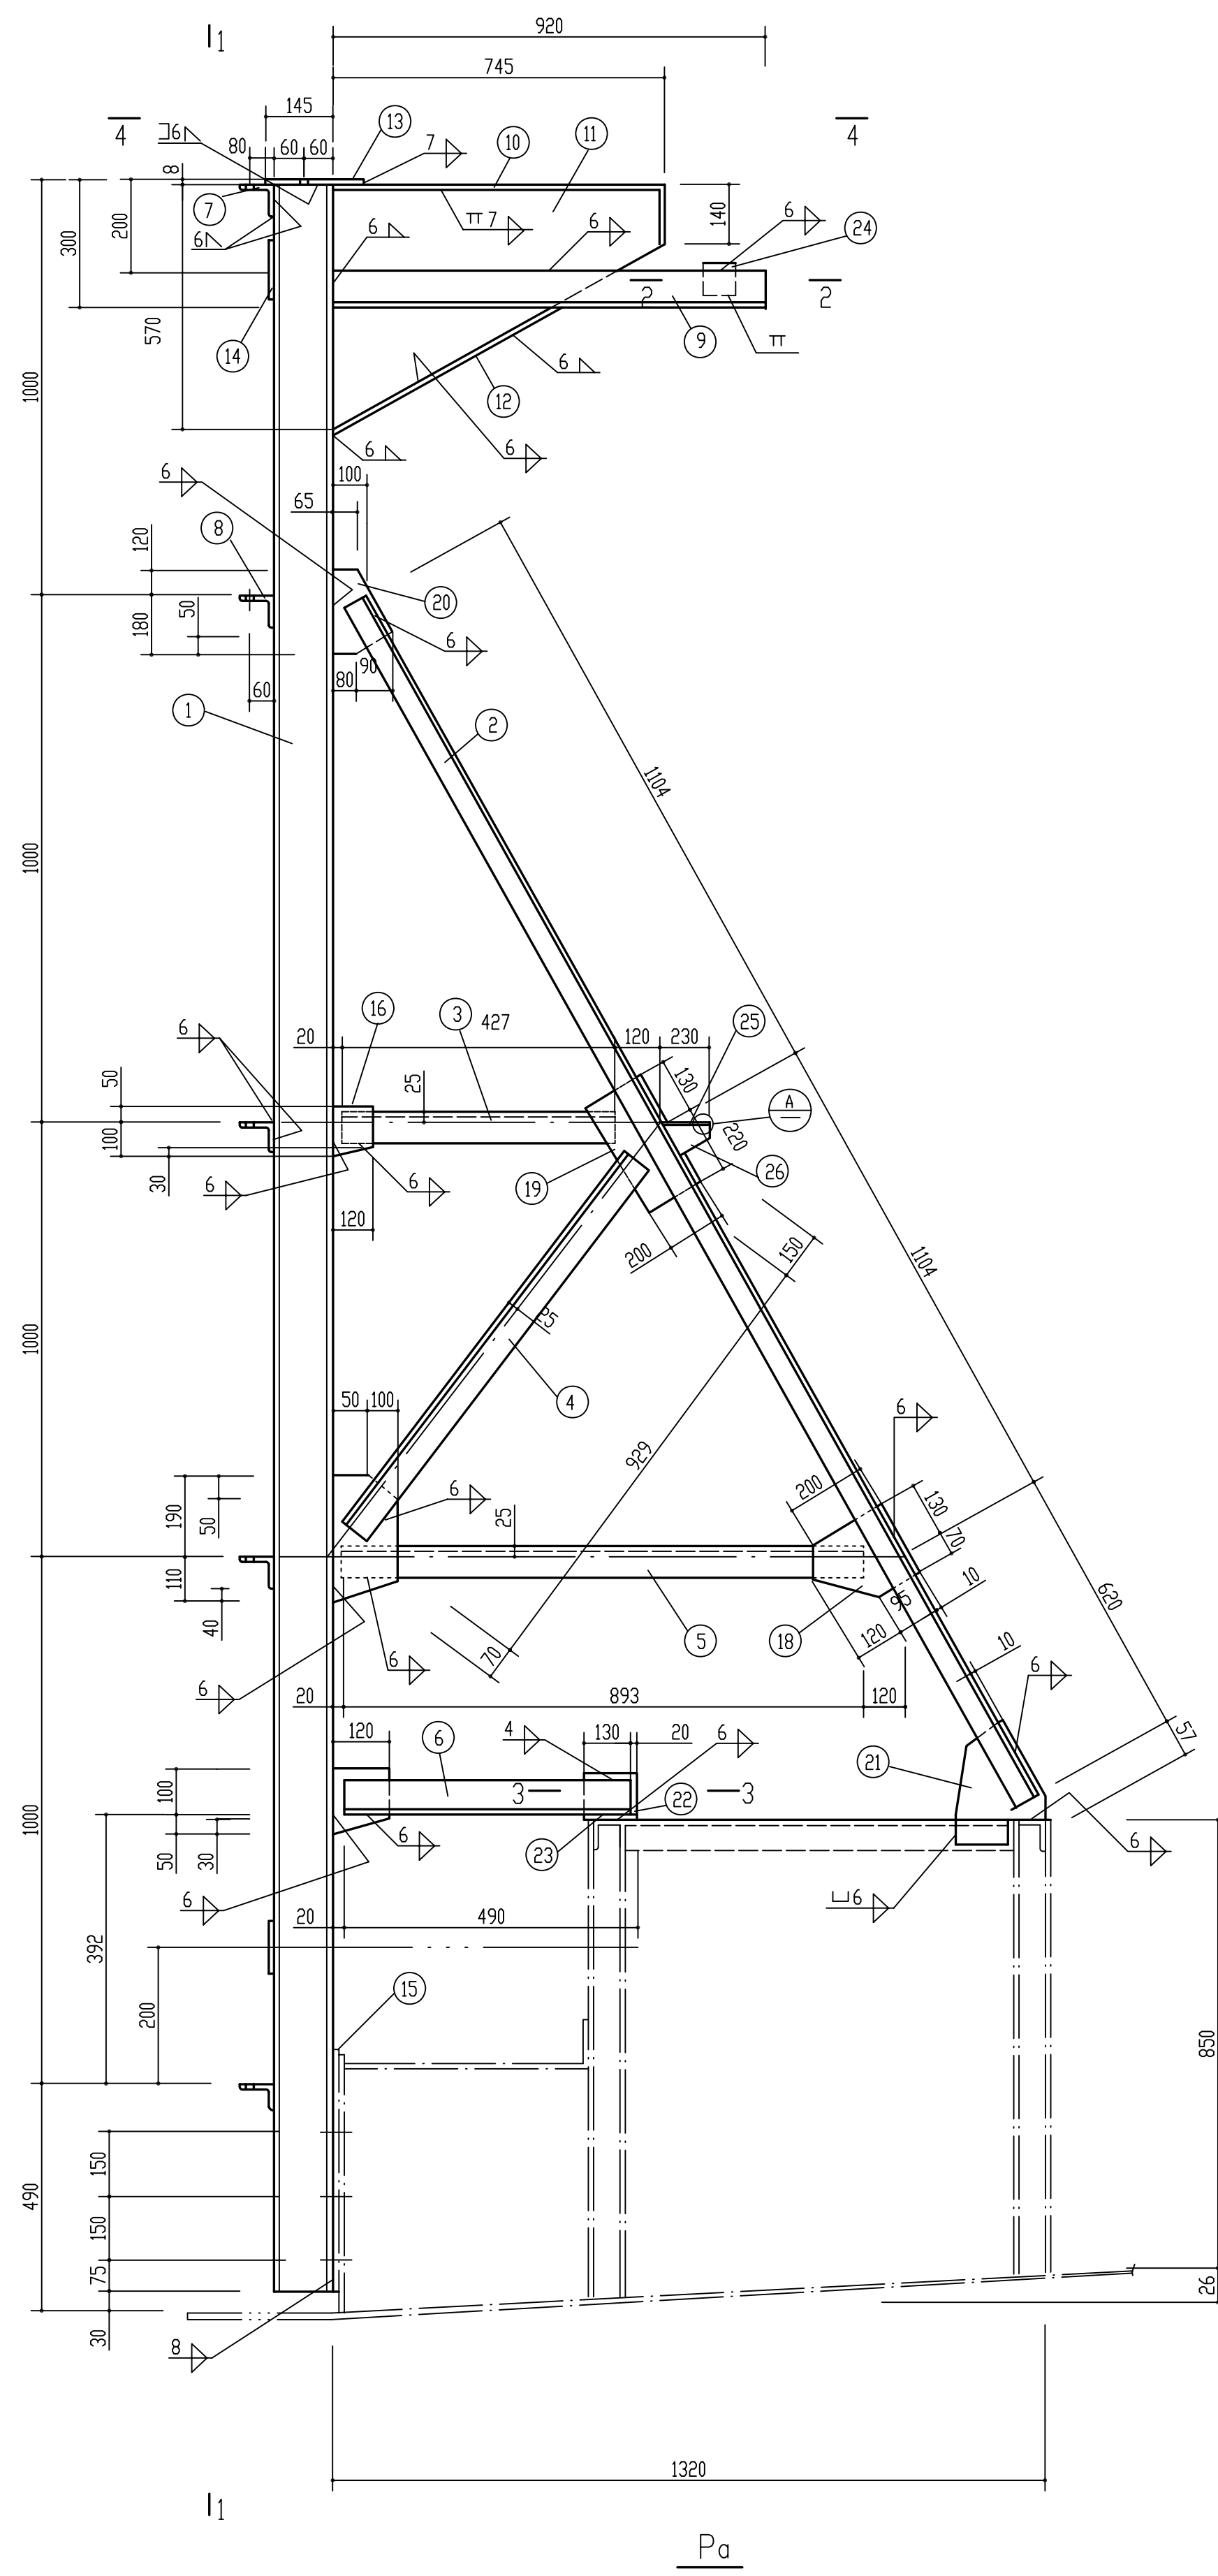

说明:

1. 构件一览表详见D3320-70-00-63-T-101/11-2.
2. 未注焊缝均为连续焊.

					合 计	12098	
Pd	30	I 16	2549.4	36	40.5	1458	共36个
Pe(共108个)	29	L110x70x7	2739	108	26.5	2862	
Pa (共36个)	28	M12X80		144			共重7693
	27	M16X80		792			
	26	-205X8	230	72	3	216	
	25	-230X8	300	36	4.3	155	
	24	-80X6	90	36	0.3	11	
	23	-150X6	220	36	1.6	58	
	22	-100X8	150	36	1	36	
	21	-165X8	197	36	2	72	
	20	-170X8	300	36	3.2	115	
	19	-210X8	350	36	4.6	166	
	18	-200X8	225	36	2.8	101.8	
	17	-150X8	300	36	2.83	101.8	
	16	-120X8	150	72	1.13	81.4	
	15	-150X12	510	36	7.2	259	
	14	-150X6	300	72	2.12	152.7	
	13	-150X8	220	36	2.1	75.6	
	12	-64X8	540	36	2.2	79	
	11	-570X6	737	36	19.8	713	
	10	-150X8	877	36	8.26	297.4	
	9	L80x6	920	72	6.79	488.9	
	8	L110x70x7	300	144	2.9	418	
	7	L110x70x7	300	36	2.9	104	
	6	L80x6	490	72	3.61	261	
	5	L63X6	893	36	5.1	184	
	4	L63X6	929	36	5.31	191.4	
	3	L63X6	427	36	2.44	88	
	2	L80x6	2828	72	20.9	1502	
	1	I 12	4452	36	51.4	1850.0	
标号	编号	断 面 尺 寸(mm)	长度 (mm)	数量	单 重 重量 (kg)	总 重	备注
九江石化设计工程有限公司				建设单位	腾龙芳烃(漳州)有限公司		
				项目名称	腾龙芳烃(漳州)50万吨/年对二甲苯工程		
设计			20000m ³ 卷帘型干式 气柜活塞构件 Pa、Pd、Pe 详图			设计阶段	详细设计
校核						专 业	设备
审核						单 元 号	
审定						比例	
			D3320-70-00-63-T-101/11-4				