



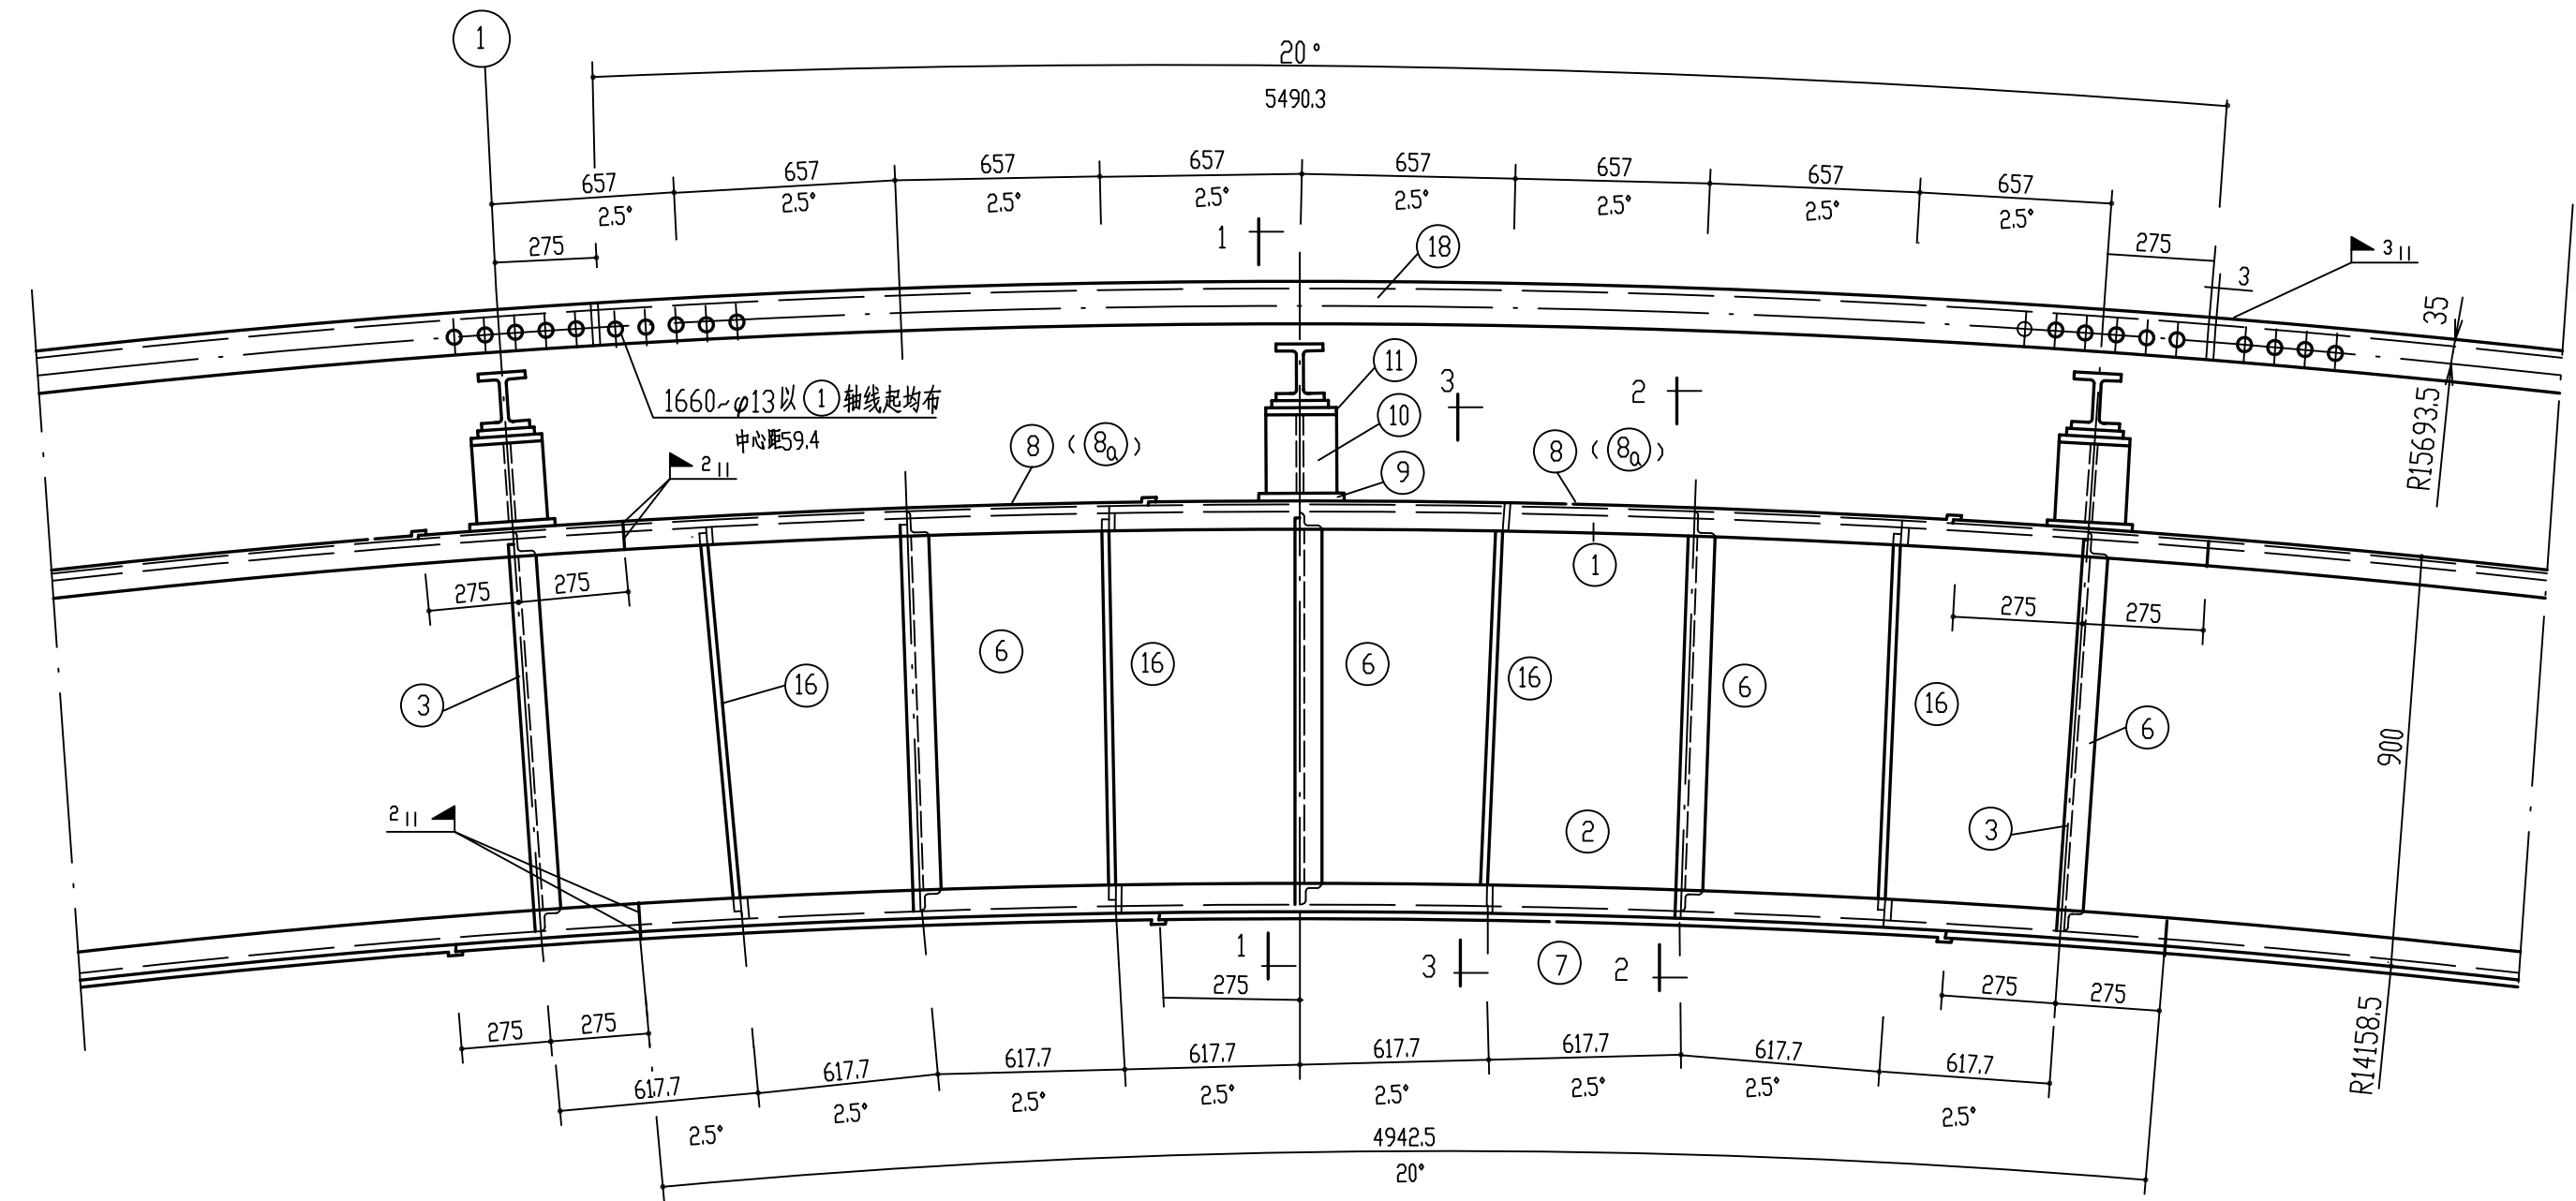


P_i P_j P_k

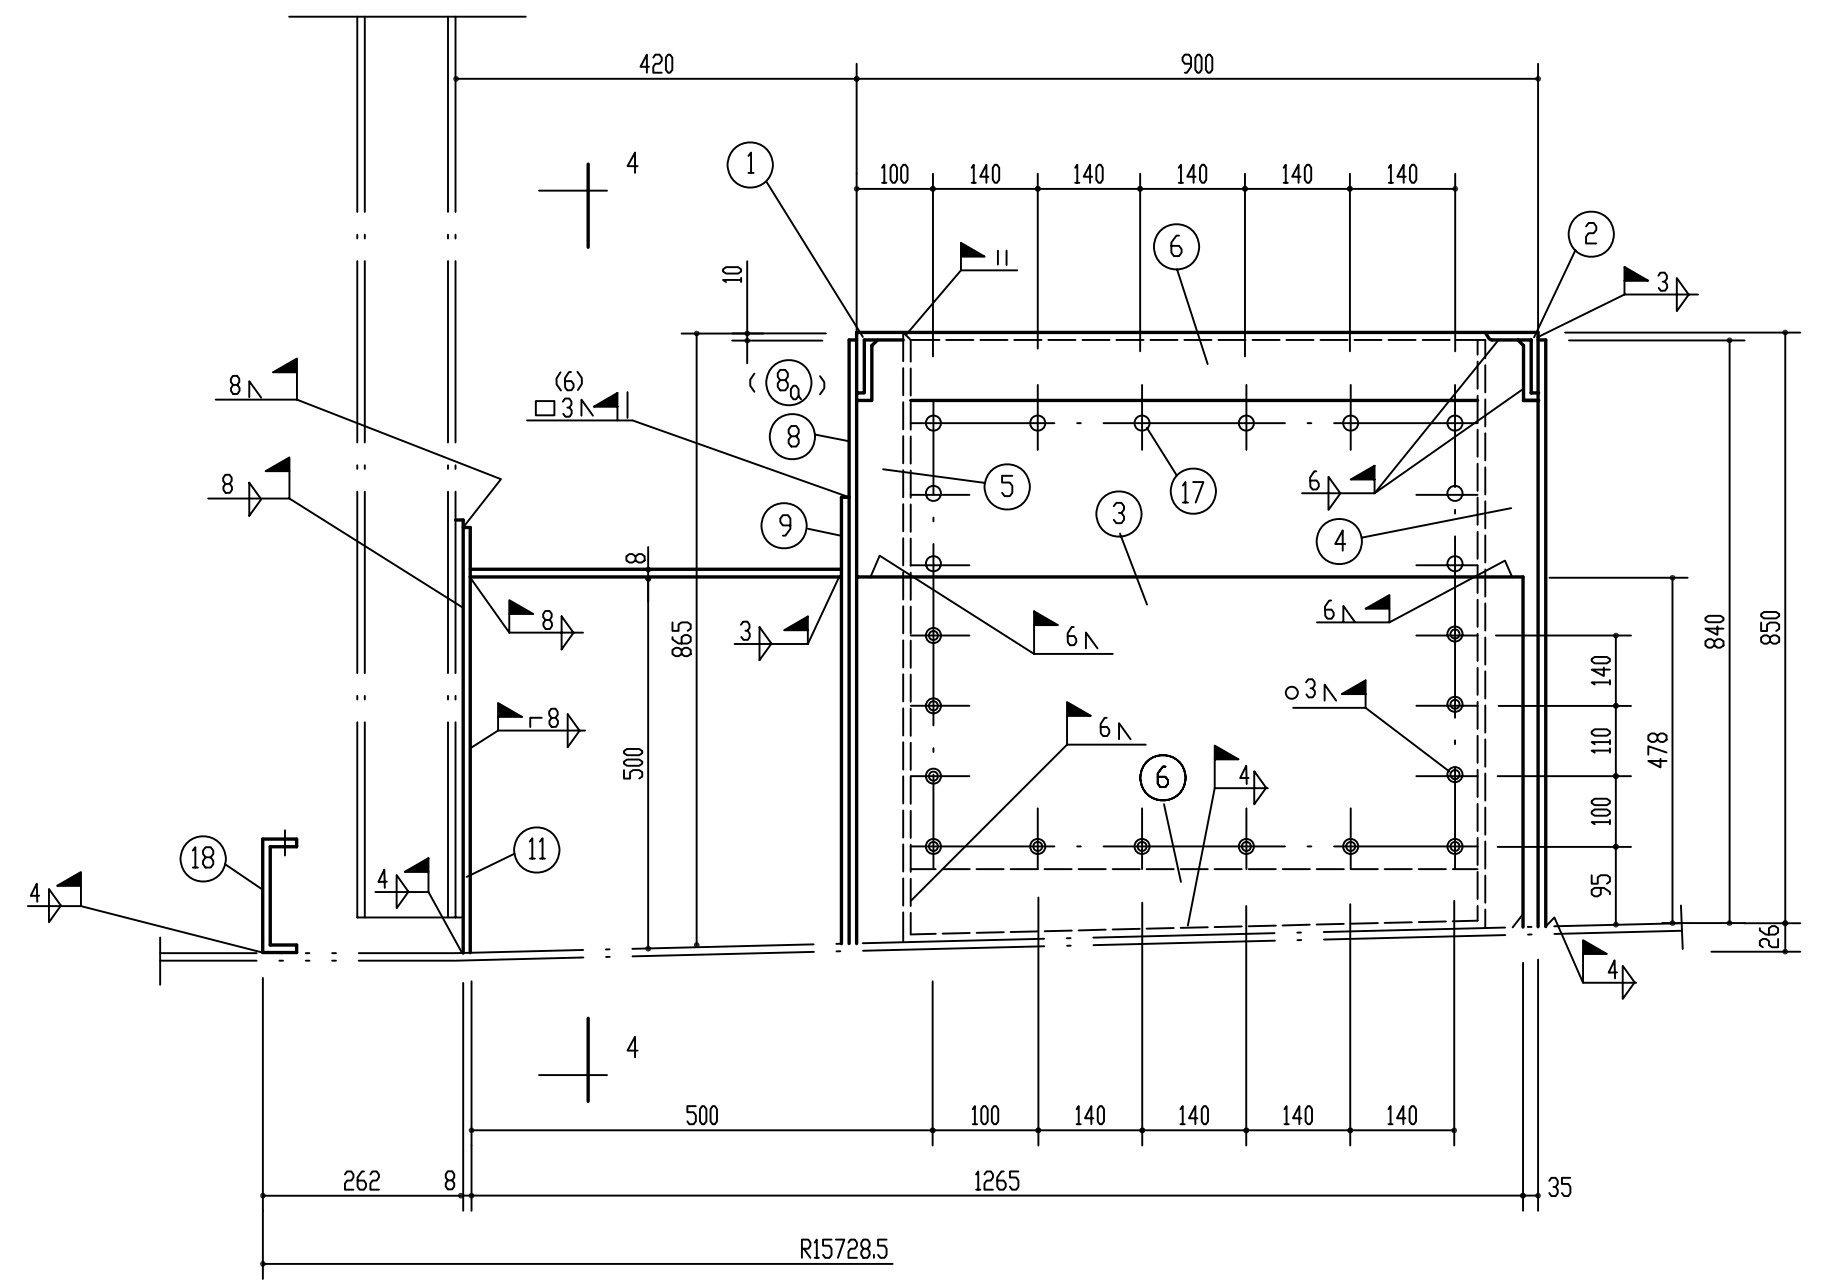


1 — 1

说明:


- 1.总说明见 D3320-70-00-63-T-101/1,2
- 2.构件布置图见D3320-70-00-63-T-101/11-1,2。
- 3.图中未注明焊缝均为连续焊。
- 4.件17 为区段内所有环形钢筋长度总和。
- 5.砼坝施工时,请结合D3320-70-00-63-T-101/11-6。

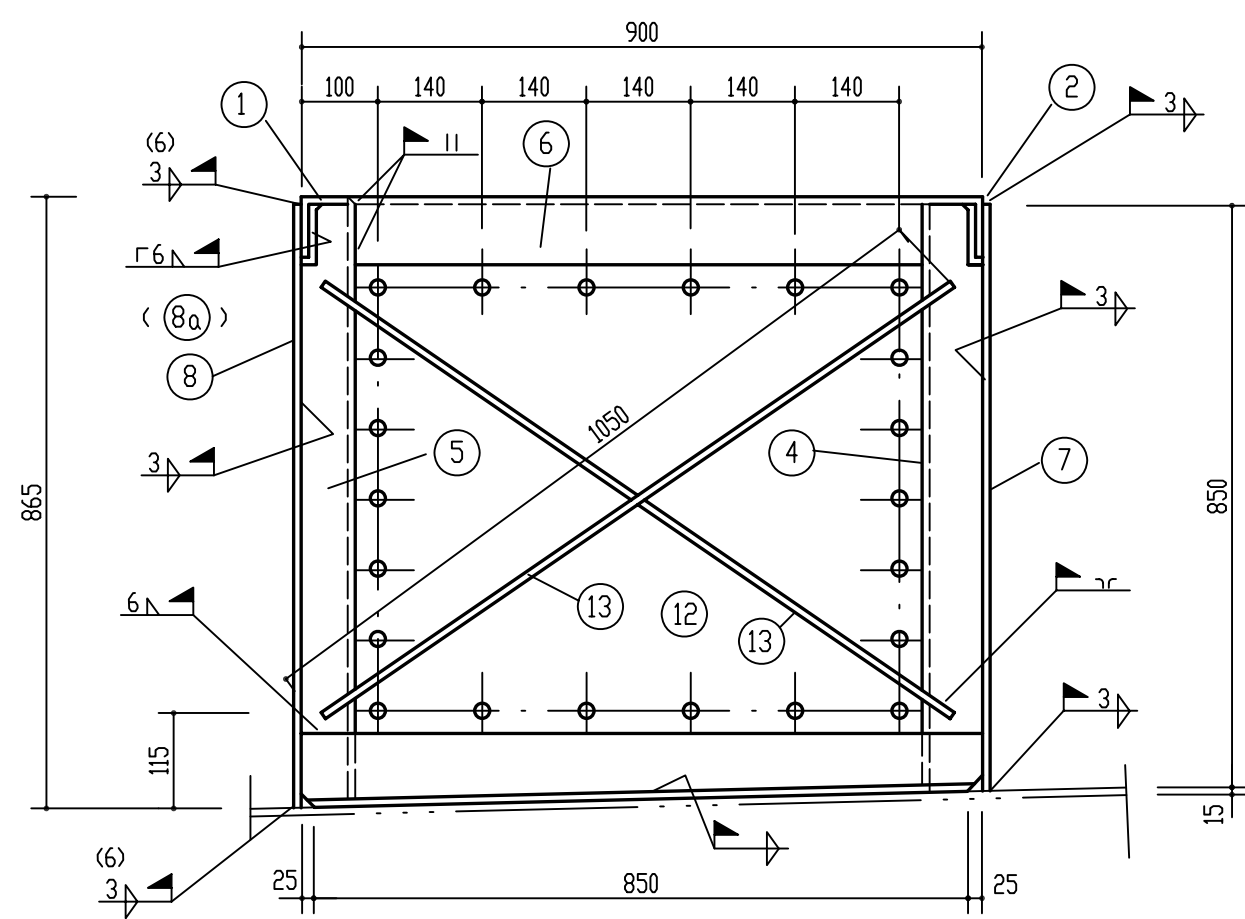


2 — 2

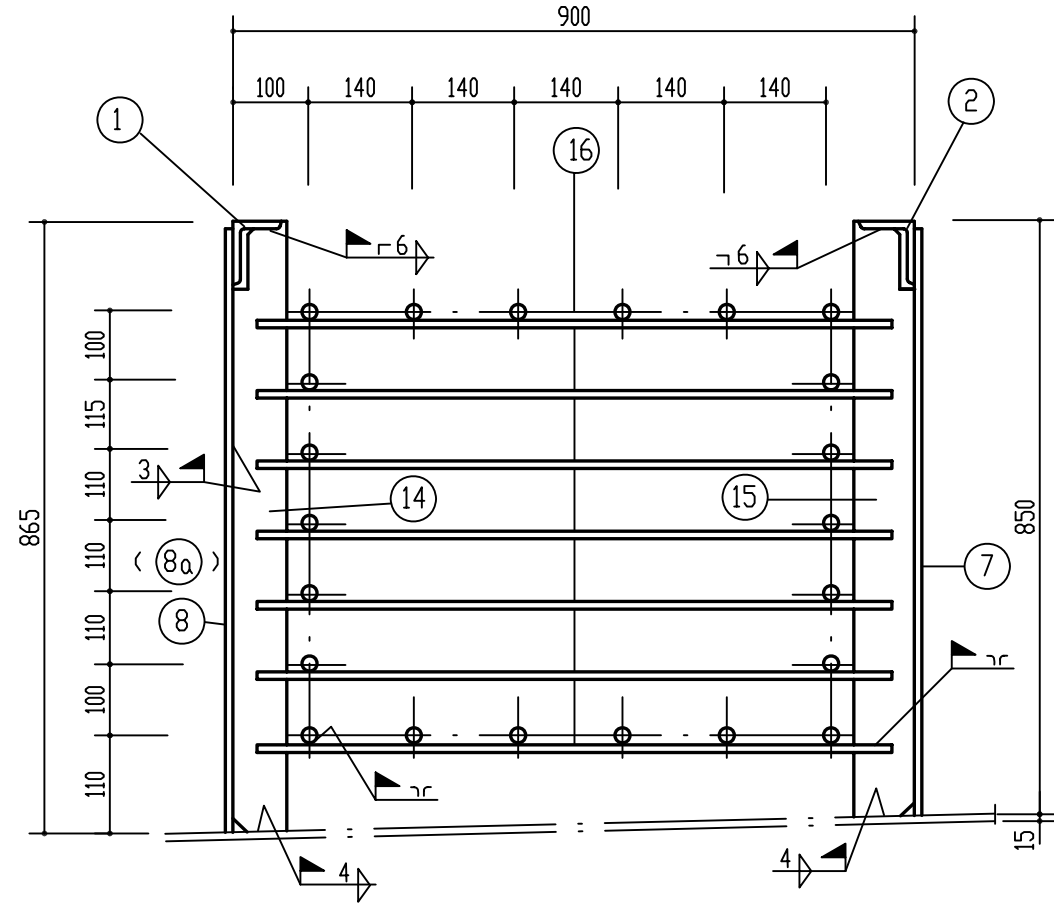


3 — 3

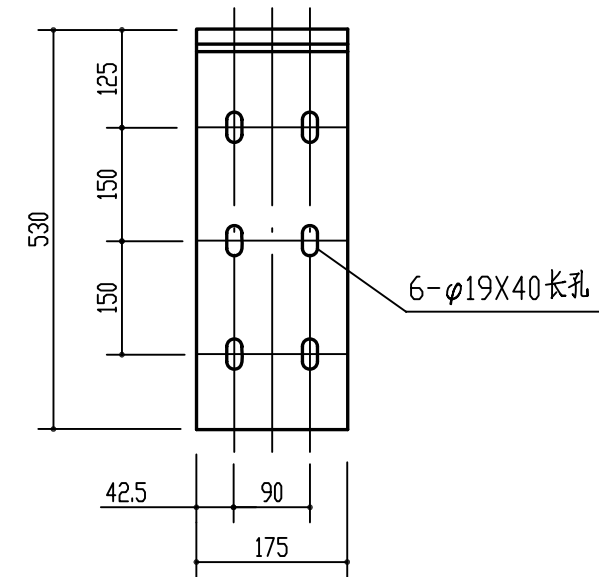


4 — 4

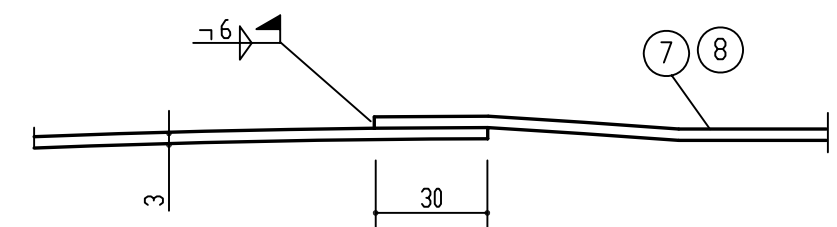


砼坝侧板搭接详图

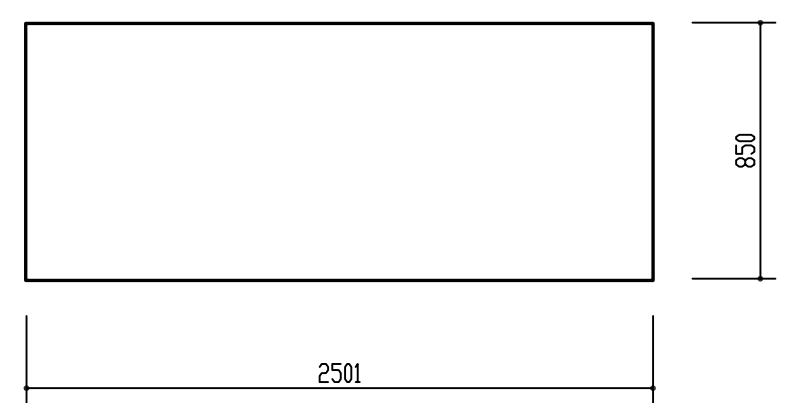

件7详图

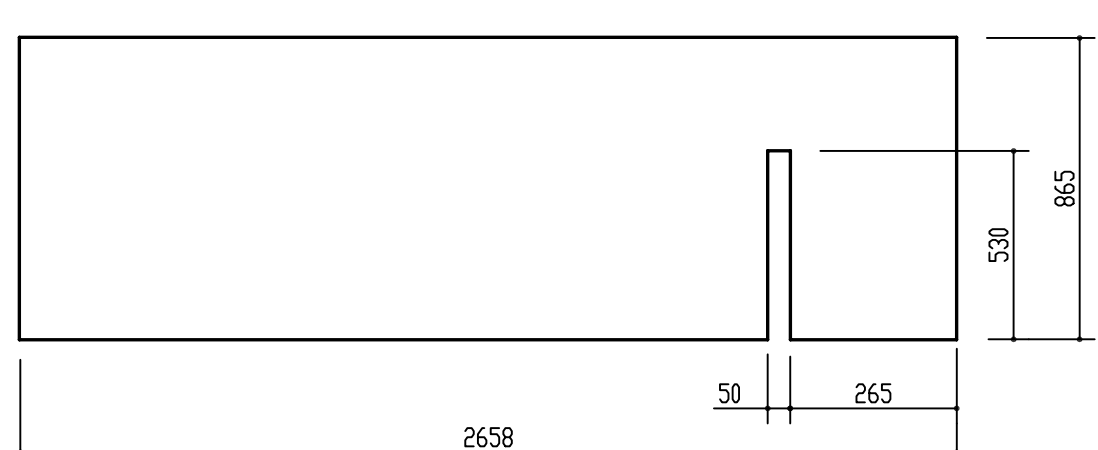

件8详图

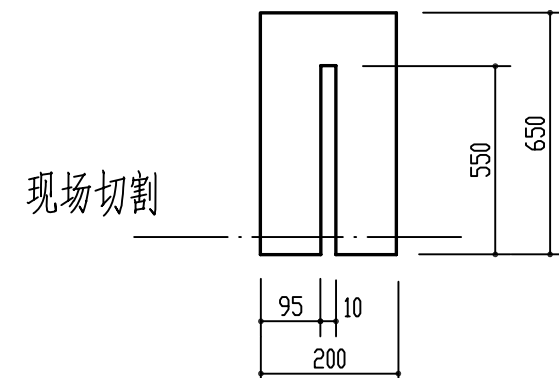

件9详图

		合 计				14130
P _k (共8个)					765	5120
	8a	-865X6	2552	2	108.2	216
	① ~ ⑦ ⑨ ~ ⑰ 与 P _j 同					
P _i (共8个)	18	□ 14a	5487	1	80	1440
P _j (共10个)				合 计	657	6570
	17	φ16	112189	1	177	
	16	φ16	850	28	1.3	37
	15	L75×6	845	4	3	12
	14	L75×6	859	4	3	12
	13	φ18	1050	4	2.1	8
	12	L75×6	900	2	6.2	13
	11	-175×8	530	2	5.8	12
	10	-175X8	390	2	4.3	9
	9	-200X6	650	2	4.8	96
	8	-865X3	2658	2	54.1	108
	7	-850X3	2501	2	50	100
	6	L75×6	750	6	5.2	31
	5	L75×6	859	4	5.9	24
	4	L75×6	845	4	5.8	24
3	-500X8	1265	2	4.1	8	
2	L75×6	4940	1	34.1	34	
1	L75×6	5254	1	36.3	36	
标号	编号	断 面 尺 寸(mm)	长 度 (mm)	数 量	单 重	总 重
					重量 (kg)	
九江石化设计工程有限公司			建设单位	腾龙芳烃(漳州)有限公司		
			项目名称	腾龙芳烃(漳州)80万吨/年对二甲苯工程		
设 计		20000m ³ 卷帘型干式 气柜活塞构件 P _i 、P _j 、P _k 详图	设计阶段	详细设计		
校 核			专 业	设备		
审 核			单 元 号			
审 定			比例			
			D3320-70-00-63-T-101/11-8			