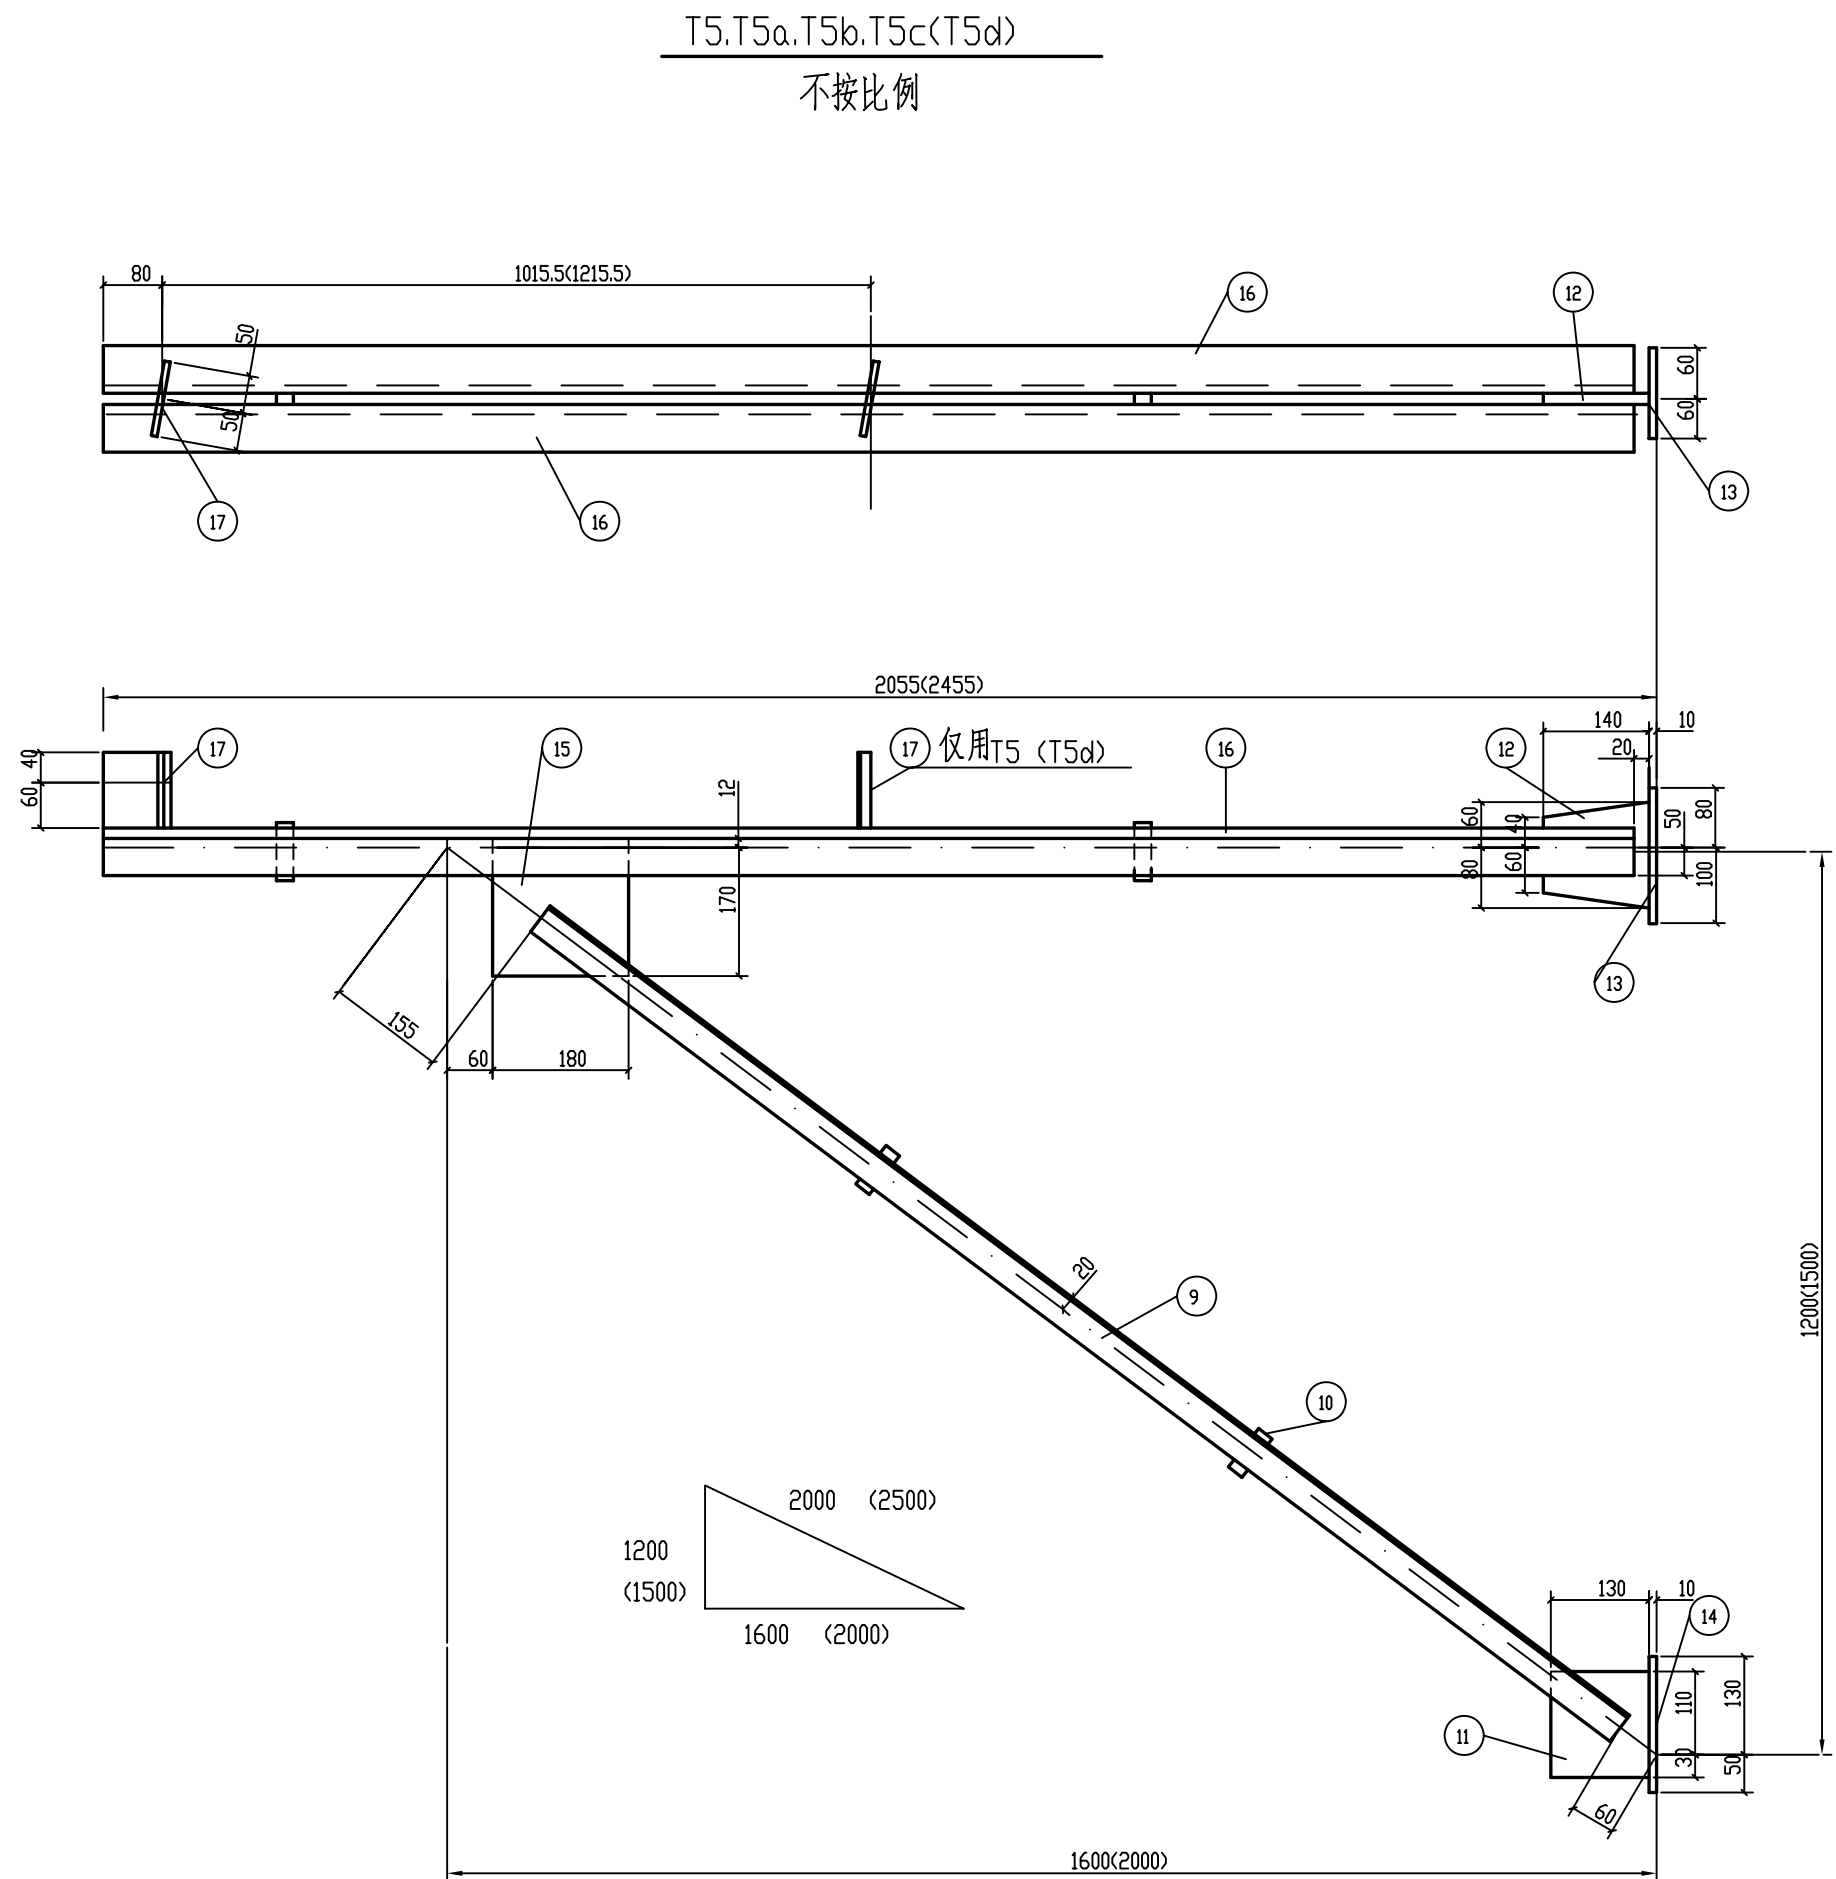
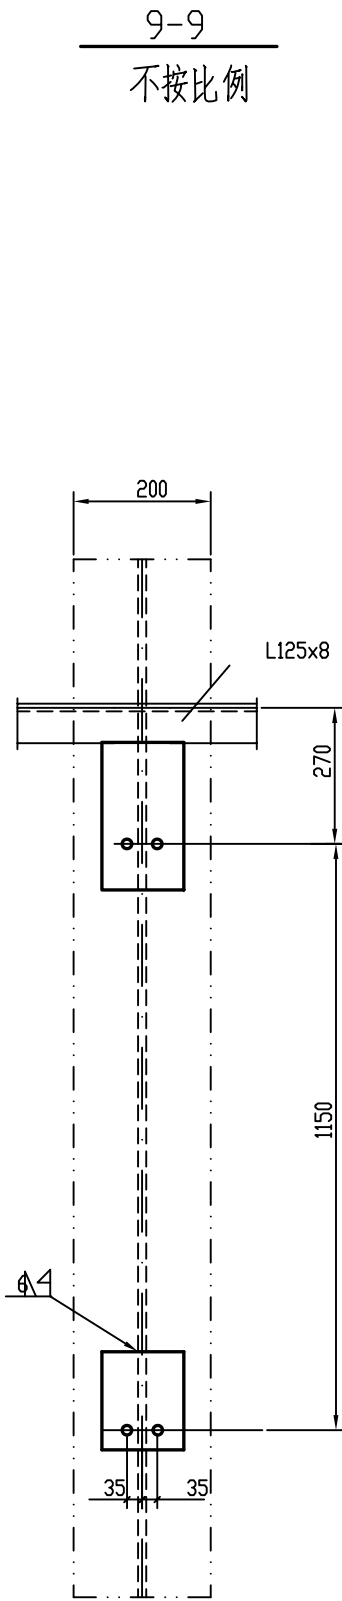
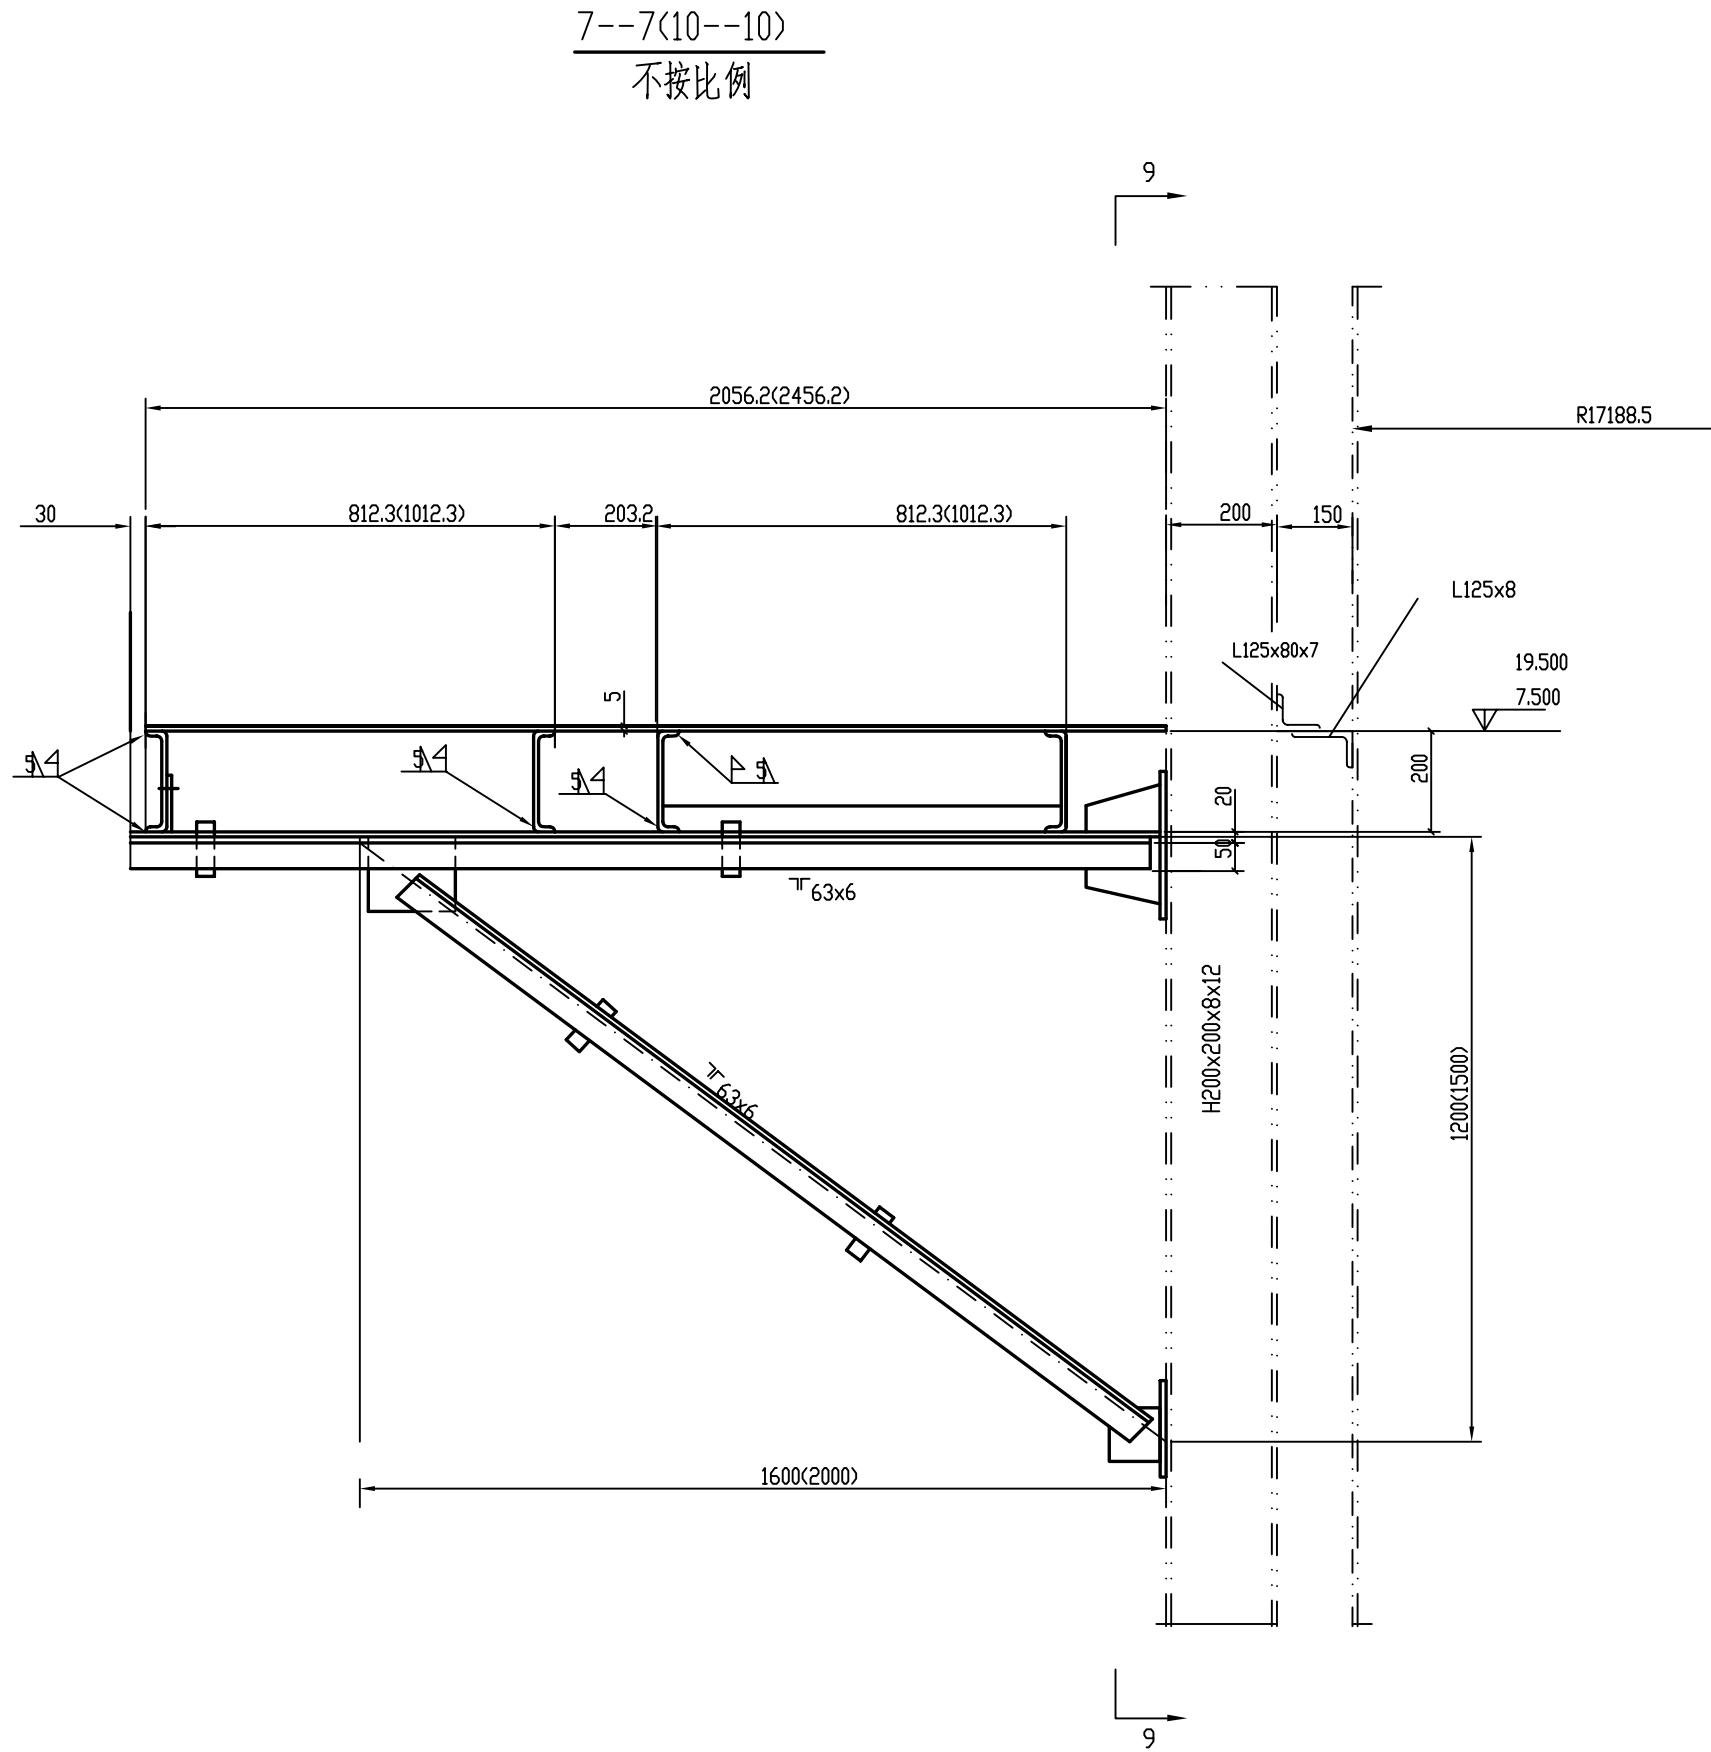
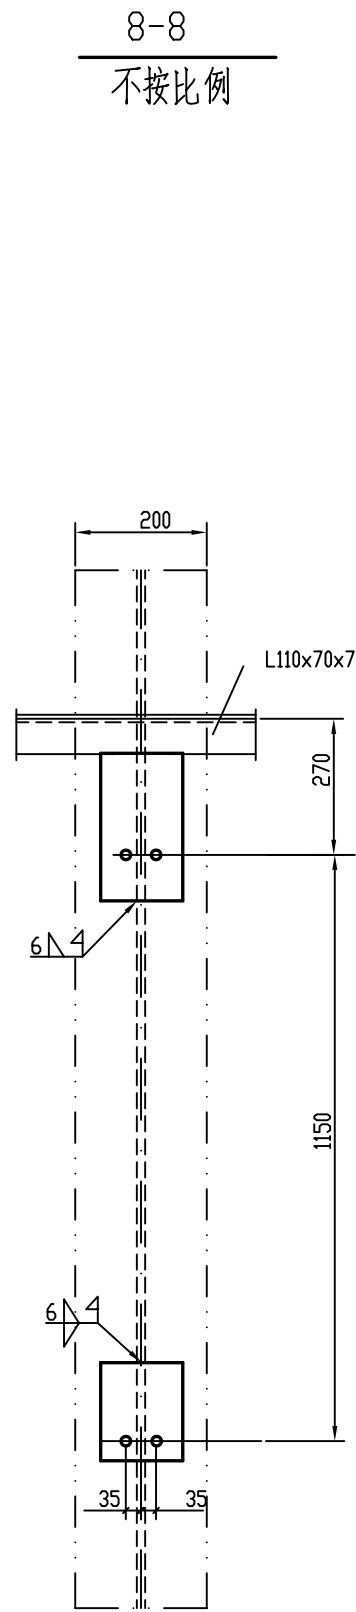
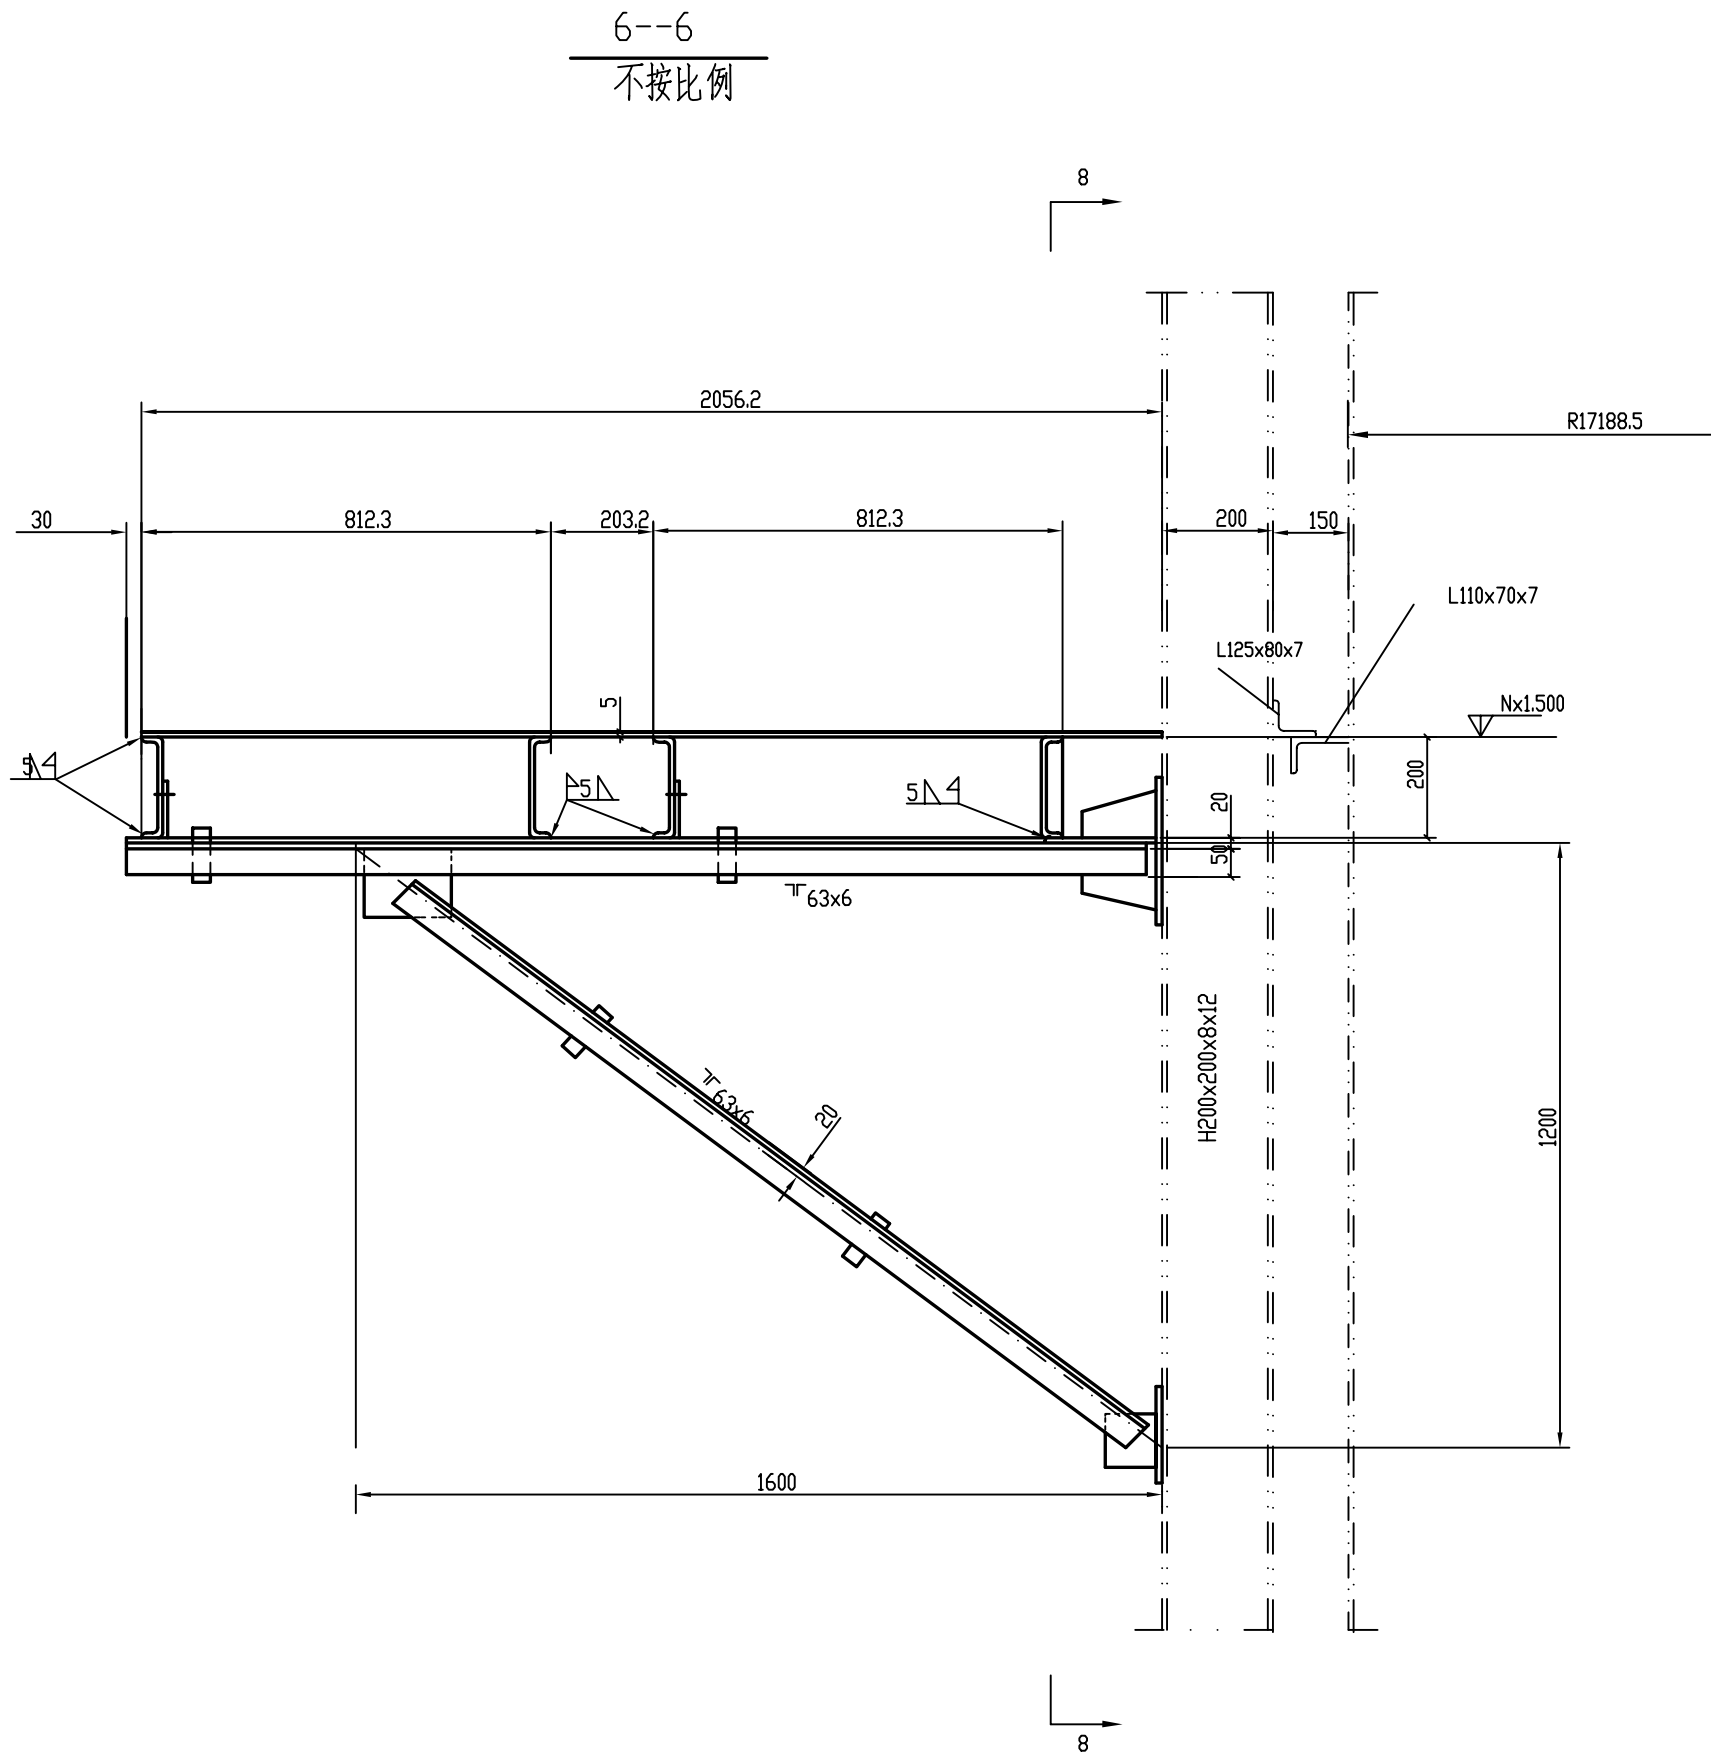


说明:

- 剖面6-6,7-7,10-10具体位置见施工图D3320-70-00-63-T-101/5-1.
- 支架T5,T5a,T5b,T5c,Td具体位置见施工图D3320-70-00-63-T-101/5-1.
- 未注螺栓孔为 $\phi 17.5$
- 本图为T5,T5d(T5b、T5d仅有一个T7零件)。
T5a,T5c 分别与T5,T5b相反(所谓相反仅仅是T7零件与垂线交角为 10°)
- 图中括号内的尺寸用于T5d.
- 除注明者外,其他所有焊缝腰高均等于相焊件中较薄者厚度,并是连续焊.

T5d (共4个)	17	同T5b				65	65	
	16	L63x6	2425	2	14	28		
		同T5b						
	9	L63x6	2285	2	13	26		
T5c (共2个)	17					54	108	
		同T5b						
	9							
T5b (共1个)						54	54	
	17	-100x6	100	1	0.5	0.5		
	16							
		同T5						
T5a (共3个)	17					54	162	
		同T5						
	9							
T5 (共4个)						54	216	
	20	弹簧垫圈 16	/	4	0.0074	0.03		GB/T899-1978
	19	螺母M16	/	4	0.029	0.12		GB/T6170-2000
	18	螺栓 M16x60	/	4	0.117	0.5		GB/T5782-2000
	17	-100x6	100	2	0.5	1		
	16	L63x6	2028	2	11.6	23		
	15	-170x8	180	1	1.9	2		
	14	-120x10	180	1	1.7	2		
	13	-120x10	180	1	1.7	2		
	12	-140x8	140	1	1.1	1		
	11	-130x8	140	1	1.1	1		
	10	-60x6	80	4	0.2	1		
	9	L63x6	1785	2	10.2	20		
	构件号	编号	断面尺寸 (mm)	长度 (mm)	数量	单重	总重	共重
					重量 (kg)			